

January 20 , 2015

Kenworth of Central Florida
1800 N. Orange Blossom Trail
Orlando, FL. 32804
407-425-3170 Ext 106
Prepared by: Rich Sgueglia

City of Orlando
1010 South Westmoreland drive
Orlando, FL 32805
407-719-5549
Prepared for: Daryl Greenlee

Florida Sheriffs Bid 14-12-0904
Spec # 14 - 52,000lb GVW Truck
(1) Kenworth T800 Cab and Chassis

Code	Bid Specification – Options	Price	Extension
Base Specification	2015 Kenworth T800 truck	102,565.00	102,565.00
125788	ISX12-G 385hp 1,350 ft/lb	24,139.00	24,139.00
2015158	Allison 4500RDS Transmission	14,103.00	14,103.00
6141600	Double Frame: full steel insert	1,758.00	1,758.00
2506181	Front Axle: 20,000 lb. Rating	5,132.00	5,132.00
3144172	Rear Axle: 46,000 lb. Rating	2,197.00	2,197.00
8890898	Cab suspension – air ride	362.00	362.00
3532194	Driver controlled differential lock	1,531.00	1,531.00
REL	Dura-pack 5000-32Yard WITH 3.94 Yd. Hopper	131,879.00	131,879.00
AUTLUBE	Autolube system lube core	7,304.00	7,304.00
8201200	Tilt/Telescope Steering Column	260.00	260.00
Telma	Telma on CNG Chassis	11,990.00	11,990.00
WT	Window Tint	152.00	152.00
224095	Warranty: ISX-G 5yr/150K PP1	2,116.00	2,116.00
4500yr	Allison 5 year Warranty	754.00	754.00
Reference:	Kenworth Specs Pages: 513 – 519		
Total Price		\$306,242.00	\$306,242.00



Kenworth of Central Florida K680
1800 North Orange Blossom Tral

CITY OF ORLANDO
1010 South Westmoreland Drive

Orlando, Florida United States 32804
Phone:
Fax:
Email:

Orlando, Florida United States 32805
Phone: (407) 719-5549
Fax:
Contact Email:
Prepared for: Daryl C Greenlee

Vehicle Summary

	Unit	Chassis
Model:	T800 Series Conventional:	Fr Axle Load (lbs): 20000
Type:	FULL TRUCK	Rr Axle Load (lbs): 46000
Description:	8 1 14 T800CNGREL	G.C.W. (lbs): 66000
	Application	Road Conditions:
Intended Serv.:	Refuse packer. Vehicles which pick up refuse or	Class A (Highway) 15
Commodity:	Refuse/recycled material	Class B (Hwy/Mtn) 85
	Body	Class C (Off-Hwy) 00
Type:	Other	Class D (Off-Road) 00
Length (ft):	20.0	Maximum Grade: 6
Height (ft):	13.5	Wheelbase (in): 268
Max Laden Weight (lbs):	4000	Overhang (in): 75
	Trailer	Fr Axle to BOC (in): 67
No. of Trailer Axles:	0	Cab to Axle (in): 201
Type:		Cab to EOF (in): 276
Length (ft):	0.0	Overall Comb. Length (in): 392
Height (ft):	0.0	
Kingpin Inset (in):	0	Special Req.
Corner Radius (in):	0	U.S. Domestic Registry, 50-State
	Restrictions	
Length (ft):	120	
Width (in):	102	
Height (ft):	13.5	

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

PACCAR FINANCIAL	Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com .
	PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/7/2015 10:35:33 AM
Effective Date: Aug 1, 2014
Prepared by: Administrator

Complete

Model Number: T800 Series Conventional.
Quote/DTPO/CO: Q13468327
Version Number: 34.20



Kenworth of Central Florida K680
1800 North Orange Blossom Trail

CITY OF ORLANDO
1010 South Westmoreland Drive

Orlando, Florida United States 32804
Phone:
Fax:
Email:

Orlando, Florida United States 32805
Phone: (407) 719-5549
Fax:
Contact Email:
Prepared for: Daryl C Greenlee

Data	Code	Description	\$ List	Weight
Model				
0000800	O	T800 Series Conventional. Elastomer bushed front spring pins & heavy-duty shock absorber brackets, 16mm. fasteners from rear cab support to end-of-frame, except tractor taper crossmember. Vinyl inside sunvisors, driver side includes strap & mirror, rider side includes strap; Under-dash center console w/ 2 cup holders, 2-12V outlets & a storage compartment, Glove box door with locking latch.	146,203	15,375
0070020	O	T800 ISX12G Engine	0	0
0080085	O	CARB Idle - Alternative fuel exempt from CARB anti-idle.	0	0
0090059	O	T800 Nonsleeper ISX12G	0	0
0091260	O	Refuse/recycled material	0	0
0093095	O	Refuse packer. Vehicles which pick up refuse or recycled material from curbside containers in residential areas. Operation typically includes very frequent stops & starts. Unloading can be at transfer station or at landfill. Road usage: some Class B required, with maximum of 5% Class D.	0	0
0095160	O	Other	0	0
0098025	O	U.S. Domestic Registry, 50-State	0	0

Engine & Equipment

0125788	O	ISX12 G 385 2013 385@1700 1350@1200	34,887	-55
N09200	N205	120..Standard Maximum Speed Limit [LSL]		
N09220	N207	0....Expiration Distance		
N09240	P13	120..Hard Maximum Speed Limit		
N09260	P14	65...Maximum Accelerator Pedal Vehicle Speed		
N09280	P16	0....Accelerator Lower Droop		
N09300	P19	65...Maximum Cruise Speed		
N09320	P38	0....Cruise Control Lower Droop		
N09360	N203	252..Reserve Speed Function Reset Distance		
N09380	N202	0....Maximum Cycle Distance		
N09400	N206	0....Maximum Active Distance		
N09420	N201	0....Reserve Speed Limit Offset		
N09440	P11	Yes..Engine Protection Shutdown		
N09460	P06	No...Gear Down Protection		
N09480	P26	1400.Max PTO Speed		
N09500	P02	No...Cruise Control Auto Resume		
N09520	P04	No...Auto Engine Brake in Cruise		
N09540	N209	0....Expiration Distance		

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/7/2015 10:35:33 AM
Effective Date: Aug 1, 2014
Prepared by: Administrator

Complete

Model Number: T800 Series Conventional.
Quote/DTPO/CO: Q13468327
Version Number: 34.20



Data	Code	Description	\$ List	Weight
		N09560 P520 Yes..Enable Idle Shutdown Park Brake Set		
		N09580 P32 5....Timer Setting		
		N09600 P233 Yes..Enable Impending Shutdown Warning		
		N09620 P234 60...Timer For Impending Shutdown Warning		
		N09640 P516 35...Engine Load Threshold		
		N09680 P33 No...Idle Shutdown Manual Override		
		N09720 P230 Yes..Enable Hot Ambient Automatic Override		
		N09740 P46 40...Low Ambient Temperature Threshold		
		N09760 P56 60...Intermediate Ambient Temperature Threshold		
		N09780 P47 80...High Ambient Temperature Threshold		
1000155	O	Prospector version 35.0 Supersedes 34.0	0	0
1000684	O	Effective VSL Setting NA	0	0
1000857	O	Engine Idle Shutdown Timer Enabled	0	0
1000859	O	Enable EIST Ambient Temp Override	0	0
1000860	O	Enable EIST in PTO Mode Use only with MX and Cummins engines	0	0
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0	0
1002060	O	Air compressor: Cummins 18.7 CFM, Cummins, PACCAR PX engines.	0	0
1051076	O	Air cleaner: Powercore engine mount 5 in. ISL, ISX11.9, ISX12, or ISMe4, 2010+	0	0
1125640	S	Cooling module: T8SH/T8B/W9S 1440 square inches. On-off fan hub, nylon fan blade, translucent top tank, air-to-air heat exchanger/aftercooler, silicone hoses w/constant torque clamps, long life coolant. Drain valve is not available w/Allison transmissions.	0	0
1160208	O	Radiator bug screen mounted between hood & grille.	112	2
1247016	O	Exhaust: single horizontal catalyst CNG single horizontal tailpipe.	0	0
1323059	O	Rail mounted Natural Gas fuel filter For spark ignited ISL9G and ISX12G engines	0	0
1504005	O	Immersion block heater 120V 1500W w/plug under door on T700, C500, T660, T800 & W900.	96	2
1816200	O	Alternator: Bosch 200 amp, brush type	135	0
1821215	O	Batteries: 4 PACCAR GP31 threaded post (700) 2800 CCA dual purpose.	174	57
1836100	S	Starter: PACCAR 12 volt electrical system, W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0	0
1840005	O	Battery disconnect switches 2, mounted on battery box.	362	2

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/7/2015 10:35:33 AM
Effective Date: Aug 1, 2014
Prepared by: Administrator

Complete

Model Number: T800 Series Conventional.
Quote/DTPO/CO: Q13468327
Version Number: 34.20



Data	Code	Description	\$ List	Weight
1900082	O	Multi-function engine connector for body builder interface for Cummins. T680/T880: This feature is standard, no code required.	54	0
1900976	O	Body builder harness to EOF for customer Installed remote throttle control. This does not include J1939 harness for communicating with 2010 engines. Requires either code 1900082 or 1900084.	73	2

Transmission & Clutch

2016158	O	Transmission: Allison World 4500RDS 6-speed w/o retarder, w/PTO provision. 5th generation. For vocational applications. Includes shift control, transmission oil temperature gauge, oil level sensor & heat exchanger. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	24,253	385
2405425	O	Driveline: 3 heavy-duty 2 centerbearing. N2401 There will be a Telma N2402 driveline retarder installed	1,844	200
2410018	O	Torque converter included w/Allison Transmission.	0	0
2410061	O	Auto neutral for Allison - single input.	8	0
2410151	O	Pushbutton control center console mounted. Class 8 with Allison Transmission.	0	0
2410203	O	Allison FuelSense Base: Includes EcoCal, 5th Gen Controls, and Dynamic Shift Sensing	0	0

Front Axle & Equipment

2506181	O	Dana Spicer D2000 Front Axle rated 20K standard track.	2,179	150
2621078	O	Front Brakes: 22K Bendix ES S-cam 16.5x6 in.	-341	-56
2690035	O	Front Brake Drum: 22,000 lbs. 16-1/2x6 in. Cast.	-105	103
2702020	O	Front Hubs Iron hub pilot 20,000 lbs. 10 Bolt 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle. Consider Wheelguards (5850002) with aluminum wheels.	278	86
2741970	S	ConMet PreSet Plus Hub package; front axle.	0	0
2750001	S	Hubcap: front vented.	0	0
2765001	O	Front Auto Slack Adjuster.	0	0
2866020	O	Front Springs: Taperleaf 20K w/ shock absorbers w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins except for C500 which has threaded pins. W900S only. Not available on W900L. W900B use 2866021.	1,101	234
2893622	O	Dual power steering gears: 20K TRW TAS65.	1,167	60
2899362	O	Power steering cooler: Serck oil-to-water PACCINT only.	523	19

Rear Axle & Equipment

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/7/2015 10:35:33 AM
Effective Date: Aug 1, 2014
Prepared by: Administrator

Complete

Model Number: T800 Series Conventional.
Quote/DTPO/CO: Q13488327
Version Number: 34.20



Data	Code	Description	\$ List	Weight
3144172	O	Dual Dana Spicer D46-170H rear axle rated at 46K. w/ 16mm housing and 2.06in. shaft diameter. Tandem rear axles.	3,387	577
3200557	O	Rear Axle Ratio - 5.57.	0	0
3334004	S	Dual Rear Brakes 16-1/2x7 in. to 46K; Bendix ES-extended service S-cam.	0	0
3392005	S	Dual Rear Brake Drums: cast.	0	0
3407050	S	Dual Rear Hubs: Aluminum hub pilot 46K 11-1/4 in. bolt circle.	0	0
3441972	S	ConMet PreSet Plus Hub package; dual rear axle.	0	0
3465002	S	Dual Rear axle automatic slack adjusters.	0	0
3485209	S	Spring Brake: 3030 high output dual.	0	0
3495226	S	Bendix 4S/4M anti-lock brake system.	0	0
3532194	O	Wheel Differential Lock for Dana Spicer axles D40-170(P)/D46-170(H)(P)(WT) forward rear axle & rear rear axle.	2,235	112
3573110	O	Separate flip valve for dual axles: differential lock or crosslock.	52	0
3749209	O	Rear suspension: Tandem Chalmers 854-46-H 46K. 54 in. axle spacing. Unladen Height: 12.5 in. Laden Height: 10.1 in. Standard restrictor can.	4,122	110
3832026	O	Chalmers shock absorbers. 52K and under suspension.	446	35

Tires & Wheels

4038722	O	Front tires: Goodyear G296 MSA DuraSeal 425/85R22.5 20PR. 44.4 in. diameter 20.6 in. SLR. all position. On/Off highway. Wide-base tire.	855	148
4277526	O	Rear tires: Bridgestone M853 12R22.5 16PR. 43.2 in. diameter. 20.0 in. SLR. Code is priced per pair of tires.	2,648	280
4900008	O	Rear Tire Quantity: 8	0	0
5042314	O	Front wheel: Accuride 29807 22.5x12.25 steel white, Steel Armor(TM) powder coat, hub pilot mount. 11500lb. maximum rating. 5-hand holes.	813	101
5242367	O	Rear wheel: Accuride 29300 22.5x9 steel Steel Armor(TM) powder coat, hub pilot mount. 10000lb. maximum rating. 5-hand holes. Not air disc brake compatible. Code is priced per pair of wheels.	1,720	316
5853906	O	Powder coat white steel wheel. Use in conjunction with front, dual front, rear, spare or lift axle wheel code(s). All wheels on chassis must have same finish color.	0	0
5900008	O	Rear Wheel/Rim Quantity: 8	0	0

Frame & Equipment

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/7/2015 10:35:33 AM
Effective Date: Aug 1, 2014
Prepared by: Administrator

Complete

Model Number: T800 Series Conventional.
Quote/DTPO/CO: Q13468327
Version Number: 34.20



Data	Code	Description	\$ List	Weight
6054600	O	Frame Rails: 10-5/8 x 3-1/2 x 5/16 in. Steel to 337 in. to 416 in. Truck frame weight is 2.91 lb.-in. per pair of rails. Section modulus is 14.80, RBM is 1,776,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	471	355
6141600	O	Full Steel Insert: for 10-5/8 in. or 10-3/4 in. Steel 337 in. to 416 in. or 2nd Insert for 11-5/8 in. steel frame. Adds 1,149,000 in.-lb to main rail RBM. Truck insert weight is 2.05 lb.-in. per pair of rails. Full frame insert length is equal to wheelbase plus rear frame cutoff plus dimension forward of front axle by model: T700, T660 and T800 = 21.26 in., C500B = bumper setting minus 0.79 in., W900B = 5.27 in., W900L = 1.50 in., W900S = 3.27 in., T440/T470 50 in. bumper setting = 21.26 in., T470 73 in. bumper setting = 72.3 in.	1,844	746
6301610	O	Bumper: Stainless steel Clad straight aluminum channel. Requires bumper setting code.	148	-11
6319485	O	48.5 in. Bumper setting. Requires a bumper code.	0	0
6321005	O	Removable Front Tow Hooks: 2.	257	15
6390103	S	Front mudflaps.	0	0
6391001	O	Custom Frame Layout: one chassis N6390 Clear frame outside both frame N6391 rails BOC to front of tandem.	1,000	0
6397001	O	Huck bolts throughout frame, where possible.	227	0
6405048	S	Battery box module: Short length aluminum parallel under cab, aluminum diamond plate cover w/ step. Up to 2 air tanks may mount to bottom of box. Batteries will be oriented perpendicular on rail.	0	0
6409901	O	Battery box location: LH Side.	0	0
6417002	O	Cab access step: RH under mounted to frame.	725	66
6479902	O	Toolbox location: RH side.	0	0
6679911	O	Component Restriction: Do Not Drive- Unit may be decked.	0	0
6679995	O	Customer will install structural end-of-frame crossmember before vehicle is placed in service.	0	0
6721102	S	Rear mudflap arms: Betts B-25 standard-duty, straight. Includes B1732 mounting brackets as standard.	0	0
6722000	S	Rear mudflap shields: White plastic antisail w/ Kenworth logo.	0	0
6742009	S	Square end-of-frame w/ o crossmember;non-towing.	0	0

Fuel Tanks & Equip

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/7/2015 10:35:33 AM
Effective Date: Aug 1, 2014
Prepared by: Administrator

Complete

Model Number: T800 Series Conventional.
Quote/DTPO/CO: Q13468327
Version Number: 34.20



Data	Code	Description	\$ List	Weight
7210000	O	Delete base model gallon aluminum fuel tank. Hardware & plumbing deleted.	-1,568	-114
7940000	O	Delete Standard Fuel Tank Location for use with CNG fuel system only	0	0
Cab & Equipment				
8024310	S	Cab: Curved Glass Conventional. Cab Includes aluminum & fiberglass fully hucked cab w/ all aluminum bulkhead doors & continuous stainless steel piano-style door hinges. Single electric horn standard. Incandescent exterior lights include diagnosable bulb detection and warning. Trailer cable on tractors includes integrity detection. Standard features include multiplex wiring for interior lights, automated pre-trip inspection, short and open check diagnostics. Warning alarm will sound when lights are left on.	0	0
8080137	O	Cab door bearing blocks, top & bottom.	28	0
8090129	O	Hood: Short Metton hood w/ grille & shell. Use for T800SH. When used with FEPTO requires pre-2010 engine and 1180 square inch radiator.	159	-17
8108010	S	Cab heater: W/integral defrosters & A/C 45,000 btu cab heater. No sleeper heater/AC. Includes 5 mode rotary control. T660 include filter media.	0	0
8201013	S	Steering wheel: 18 in. 4-spoke.	0	0
8201200	O	Adjustable telescoping tilt steering column.	358	10
8208496	O	Three spare switches: Wired to power.	92	0
8220106	O	Gauge: Dash mounted air filter restriction gauge.	120	0
8222708	O	Delete fuel & DEF tank gauges replace w/plugs. Only for CNG engine only.	-56	0
8225658	O	Gauge: Axle oil temperature, dual-drive axle. (2 gauges) w/integral warning light.	112	0
8282009	S	Instrument package: Includes speedometer, tachometer, fuel gauge, engine coolant temperature gauge, engine oil pressure, voltmeter. Class 8 also includes primary & secondary air reservoir gauges & an air application gauge. DEF level gauge and warning lamp are included with 2010+ engines. Engine hour meter and outside air temperature readouts are standard. Primary read out will be MPH. Add 8240620 to switch primary scale to KPH in Canada.	0	0
8331100	S	Cab interior: Splendor. Includes smooth upholstered side & back panels w/stitched accent lines, upholstered door pads, full vinyl headliner, black dash panels & black rubber floor mats.	0	0
8343304	S	Interior color: Slate Gray w/trim Dark Slate Gray	0	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/7/2015 10:35:33 AM	Complete	Model Number:	T800 Series Conventional.
Effective Date:	Aug 1, 2014		Quote/DTPO/CO:	Q13468327
Prepared by:	Administrator		Version Number:	34.20



Data	Code	Description	\$ List	Weight
8410191	O	Driver seat: Kenworth Air cushion Plus HB vinyl. Standard features includes 7 in. fore and aft slide adjustment w/isolator, 6-23 degree recline, air suspension with cover, dual armrests, and single chamber air lumbar support. Seat cushion is 20 inches wide w/ 2-position tilt and 2-position front cushion extension. Seat material has a horizontal stitch pattern and is 2-tone in color. Seat back is carpeted and includes a map pocket. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Black seat belts for T700, gray on all other models.	103	0
8478330	O	Rider seat: 2 man bench vinyl. Standard features include 34.5 in. wide 2-tone seat cushion w/ fixed base. Armrests are not available. Seat back is carpeted. Includes inside visor and retractable 3-point matching seat belts. Black seat belts for T700, gray on all other models.	499	22
8490110	S	Seat color: Dark Slate Gray.	0	0
8496559	O	Driver and Rider Seat Belts: Orange Seat Belts. Replacing standard color.	29	0
8601421	O	Kenworth Radio with AM/FM/WB/USB and Bluetooth	395	4
8699926	O	CB installation kit: Center mounted of header. W/header mounted quick release CB mount. One red power post & one black ground post. Includes dual antenna leads located on the mirror brackets. Includes dual antenna & separate speaker.	230	2
8700108	O	Under dash center console: Includes one cupholder & two 12V outlets. For use w/Autoshift, Ultrashift, & Allison Gen IV only.	24	0
8700168	S	Non-self cancelling turn signal: W/column-mounted headlight dimmer switch & intermittent wiper control.	0	0
8700186	S	Electric LH & RH door locks.	0	0
8800271	S	Long grabhandle RH side of cab.	0	0
8800373	S	Long grabhandle LH side of cab.	0	0
8800400	S	Grabhandle LH inside door frame above dash.	0	0
8800401	S	Grabhandle RH inside door frame above dash.	0	0
8832115	O	DAYLITE DOOR: LH/RH INCL RH PEEPER WINDOW	0	0
8841623	O	Dual rectangular air horn 26 in. LH/RH top of roof. Includes air horn covers.	204	4
8850300	S	Single convex mirror 8-1/2 in. x 4-7/16 in. located on rider side, and non-heated.	0	0
8850817	O	Dual convex mirror 8 in. fender mounted, and non-heated.	188	15
8866100	S	Mirror: Dual Prutsmann fixed heated mirrors 7 in. x 16 in. includes 7-1/2 in. convex mirror, RH.	0	0
8869005	S	Mirror brackets 8-1/2 ft load width.	0	0
8871438	S	Rear Cab Stationary Window 17 in. x 36 in.	0	0
8879200	S	Manual LH & electric-powered RH door window. Switch located on door.	0	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/7/2015 10:35:33 AM	Complete	Model Number:	T800 Series Conventional.
Effective Date:	Aug 1, 2014		Quote/DTPO/CO:	Q13468327
Prepared by:	Administrator		Version Number:	34.20




Kenworth of Central Florida K680
1800 North Orange Blossom Trail

CITY OF ORLANDO
1010 South Westmoreland Drive

Orlando, Florida United States 32804
Phone:
Fax:
Email:

Orlando, Florida United States 32805
Phone: (407) 719-5549
Fax:
Contact Email:
Prepared for: Daryl C Greenlee

Horizontal Dimensions

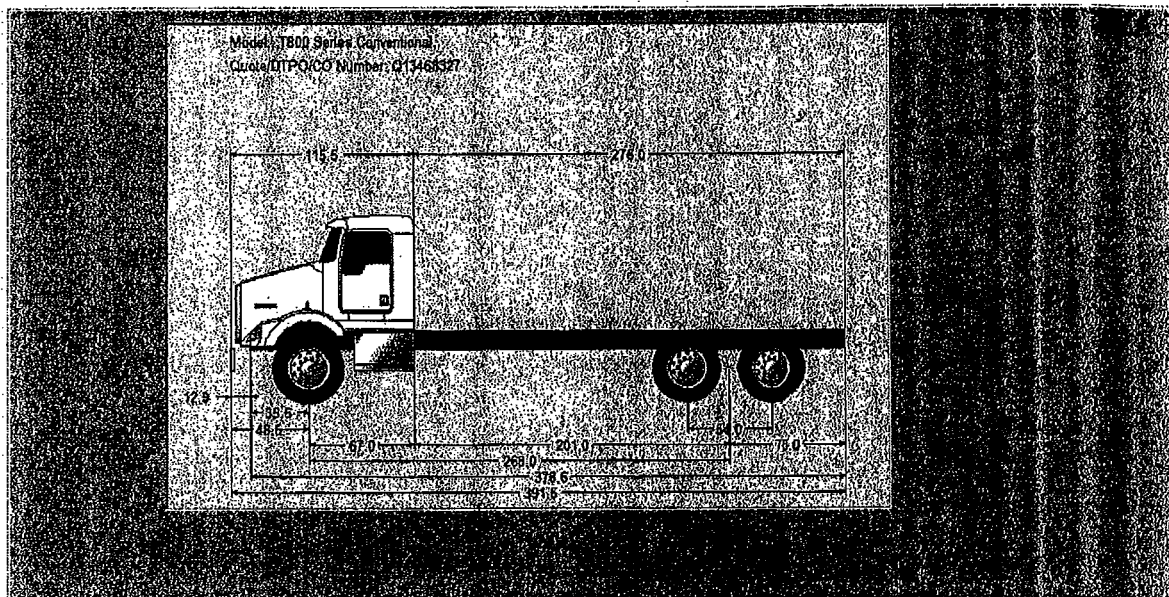

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/7/2015 10:35:47 AM
Effective Date: Aug 1, 2014
Prepared by: Administrator

Complete

Model Number: T800 Series Conventional
Quote/DTPO/CO: Q13468327
Version Number: 34.20



Kenworth of Central Florida K680
1800 North Orange Blossom Trail


CITY OF ORLANDO
1010 South Westmoreland Drive

Orlando, Florida United States 32804
Phone:
Fax:
Email:

Orlando, Florida United States 32805
Phone: (407) 719-5549
Fax:
Contact Email:
Prepared for: Daryl C Greenlee

Fuel Tanks

Under Cab
Back Of Cab 1
Back Of Cab 2
Between Ribs
Across Ribs BOC

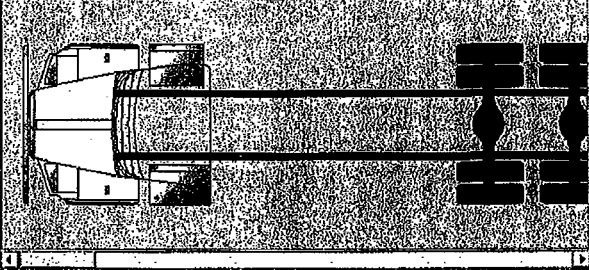

Position	Description	Price	Weight
RH Under	Cab access slope RH under mounted to frame.	725	65
LH Under	Battery box module. Short length aluminum.	0	0
LH BOC1	Duple base model gallon aluminum fuel tank.	-1589	-114

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/7/2015 10:36:02 AM
Effective Date: Aug 1, 2014
Prepared by: Administrator

Incomplete

Model Number: T800 Series Conventional.
Quote/DTPO/CO: Q43568563
Version Number: 34.20

QUOTATION



Prepared For:

BIDDERS
HGAC BID

Ship To:

Florida Truck Dealer's

Prepared By:

Tampa Crane & Body

QUOTE REFERENCE NUMBER	ISSUE DATE	VALID FOR	EST. DELIVERY FROM RECEIPT OF ORDER	SUBMITTED BY	SHIPPED VIA	FOB POINT	TERMS
REL	10-1-2013	12 MONTHS	CHECK AT TIME OF ORDER	FLORIDA HEIL DEALERS	DRIVE AWAY	dealership	Net 30 Days

Body

Dura-pack 5000-32Yard WITH 3.94 Yd. Hopper

Standard Options

Hot Shift PTO
Direct Mount Pump
In Body Oil Tank
Hopper Work Light
Body Side Backing Assist Lights
Peterson Smart Lights
Left Hand Buzzer
HD contractors Package (1/4" hopper floor, 3/16" hopper front face and tailgate spill troughs)
Body Side Access Door and Ladder
20 lb. Fire Extinguisher
Mud Flaps front & rear of rear axle
Left hand buzzer kit
Freight from Ft. Payne
12 Month Warranty
All Standard Features
Net price \$75,948.00

Option: to be included in final price

- 1) 5 year warranty on cylinders
- 2) Mount customer's camera system
- 3) Two (2) Bayne Cart Flipper Model MBTL 180
- 4) CNG Tank 80DGE frame rail mount
- 5) Front fill on bumper w/kill
- 6) Fast fill
- 7) CNG Installation kit includes brackets, hardware and mounting of CNG system

Total Body and with Options \$130,897.00

Quote Per Unit

THANK YOU FOR THE OPPORTUNITY TO QUOTE!

If you have any questions concerning this quotation, please feel free to contact us.

Andrew J. Solo
Tampa Crane & Body, Inc.
Cell 813-323-2585



PROBILT
ProBilt Services Inc.

144 North Park Drive
Chillicothe, OH 45601
Phone: 855-900-BILT (2468)

Estimate

DATE: August 1, 2014
Estimate #: 140810.00
FOR: Telma
BILL TO: KW of Central Florida
Rich Sgueglia
Street Address
City, ST ZIP Code
Phone:

Line	Condition	Description	Quantity	Cost	Parts	Labor
1	Install Telma on CNG Chassis	Labor	25.00	\$85.00		\$2,125.00
2	2014 T800 Kenworth	Driveline Work (Sublet)	1.00	\$830.00	\$860.00	
3	291" Wheelbase	Telma Refuse Kit TIK13087	1.00	\$8,245.15	\$8,245.15	
4	66,000# GVWR	Hardware and Supplies	1.00	\$150.00	\$150.00	
5	5.57 Axle Ratio	Towing from Active to ProBilt	1.00	\$225.00	\$225.00	
6	12R22.5 Rear Tires	Towing from ProBilt to Active	1.00	\$225.00	\$225.00	
7	Driveline 1810 Series					
8	Allison 4500RDS					
9	Dana D46-170H					
10	Refuse					
11	Air Foot Controls					
12	ISX12G 385 hp 1350 lb.ft. @1200					
13						
14						
15						
16						
17						
18						
19						
20						
21						
22						
23						
24						
25						
26						
27						
28						
29						
30						
31						
32						
33						
34						
35						
36						
37						
38						
39						
40						

Any take-off parts will be scrapped or otherwise disposed of at ProBilt's discretion. Products purchased from and installed by ProBilt Services Inc., or ProBilt Services of Ohio Inc., will be replaced or repaired in accordance with the specific vendor's existing product replacement warranty program at any authorized dealer for that product. ProBilt Services shall not be liable for incidental or consequential damage, including but not limited to, loss of income; damage to vehicle, attachments, trailers and cargoes; towing expenses; or fees. (See ProBilt Warranty Statement for full disclosure). ProBilt is not responsible for damage caused by weather, acts of God, or terrorism.

SUBTOTAL	\$	11,830.15
TAX RATE		0.00%
SALES TAX	\$	-
Active Transport Service Fee	\$	70.00
TOTAL		\$11,900.15