

January 28, 2015

Kenworth of Central Florida  
1800 N. Orange Blossom Trail  
Orlando, FL. 32804  
407-425-3170 Ext 106  
Prepared by: Rich Sgueglia

City of Orlando  
1010 South Westmoreland drive  
Orlando, FL 32805  
407-719-5549  
Prepared for: Daryl Greenlee

**Florida Sheriffs Bid 14-12-0904**  
**Spec # 11 - 25,500lb GVW Truck**  
**(1) Kenworth T270 Cab and Chassis**

Code	Bid Specification – Options	Price	Extension
Base Specification	2015 Kenworth T270 truck	68,985.00	68,985.00
120300/2011205	Paccar PX7-300hp/660ft./lb.3000RDS	6,661.00	6,661.00
821200	Telescopic and tilt wheel	351.00	351.00
8480060	2 man passenger bench seat	372.00	372.00
8850817	Dual Fender mtd convex mirrors	161.00	161.00
3836300	N/A Stabilizer Bars-N/A Rear Stabilizer ILO	850.00	850.00
6141450	Double Frame	1,281.00	1,281.00
ASL-2014FSA	Heil 13 Yard Rear Loader Body	112,230.00	112,230.00
3531000	Driver controlled differential lock	810.00	810.00
9206218	Warranty Paccar PX-7 PP1 5yr/100K	1,058.00	1,058.00
9206227	Warranty Paccar PX-7 Aftertreatment 5yr/100K	504.00	504.00
3500 5yr	Allison 5 year Warranty	899.00	899.00
WT	Window Tint	152.00	152.00
<b>Note: All Options</b>			
<b>Reference: Kenworth Specs Pages: 513 – 519</b>			
<b>Total Price</b>		<b>194,314.00</b>	<b>194,314.00</b>



Kenworth of Central Florida K680  
1800 North Orange Blossom Trail

CITY OF ORLANDO  
1010 South Westmoreland Drive

Orlando, Florida United States 32804  
Phone:  
Fax:  
Email:

Orlando, Florida United States 32805  
Phone: (407) 719-5549  
Fax:  
Contact Email:  
Prepared for: Daryl C Greenlee

## Vehicle Summary

Unit		Chassis	
Model:	T300 Series Conventional	Fr Axle Load (lbs):	10000
Type:	FULL TRUCK	Rr Axle Load (lbs):	16000
Description:	13yd KWT270 Jan 2015	G.C.W. (lbs):	26000
Application		Road Conditions:	
Intended Serv.:	Refuse hauler, Vehicles which haul refuse,	Class A (Highway)	10
Commodity:	Refuse/recycled material	Class B (Hwy/Mtn)	85
Body		Class C (Off-Hwy)	05
Type:	Refuse, other	Class D (Off-Road)	00
Length (ft):	14.0	Maximum Grade:	6
Height (ft):	12.0	Wheelbase (in):	164
Max Laden Weight (lbs):	9100	Overhang (in):	60
Trailer		Fr Axle to BOC (in):	68
No. of Trailer Axles:	0	Cab to Axle (in):	96
Type:		Cab to EOF (in):	156
Length (ft):	0.0	Overall Comb. Length (in):	265
Height (ft):	0.0	Special Req.	
Kingpin Inset (in):	0	U.S. Domestic Registry, 50-State	
Corner Radius (in):	0		
Restrictions			
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

**Note: All sales are F.O.B. designated plant of manufacture.**

**PACCAR  
FINANCIAL**

Ask your dealer for a quote today, or visit our website @ [www.paccarfinancial.com](http://www.paccarfinancial.com).

PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/26/2015 12:14:48 PM  
Effective Date: Aug 1, 2014  
Prepared by: Administrator

**Complete**

Model Number: T300 Series Conventional.  
Quote/DTPO/CO: Q61468327  
Version Number: 34.20



Kenworth of Central Florida K680  
1800 North Orange Blossom Trail

CITY OF ORLANDO  
1010 South Westmoreland Drive

Orlando, Florida United States 32804  
Phone:  
Fax:  
Email:

Orlando, Florida United States 32805  
Phone: (407) 719-5549  
Fax:  
Contact Email:  
Prepared for: Daryl C Greenlee

Data	Code	Description	\$ List	Weight
Model				
0000310	O	<b>T300 Series Conventional.</b> Electric Door locks LH/RH; Ignition & doors keyed alike; Single electric horn; Single-piece windshield; Electric windshield wipers, 2-speed plus intermittent; Electric windshield washers; Steering wheel 18in. 4-spoke; Glovebox door with locking latch; Dash-mounted cruise control with switches; Turn signal switch with column-mounted dimmer; Standard dash panels include gray w/ burl wood accents; Slate Gray interior primary color; Dark Slate Gray seat color; Floor mat; Inside sunvisor, LH/RH; Door courtesy lights; Under-dash center console with 1 cup holder, 1 ashtray & 1 lighter.	78,353	9,830
0070005	O	<b>T270 Class 6: medium-duty Conventional.</b>	0	0
0080050	O	<b>CARB Idle Emissions Reduction Feature for PX-7 and PX-9</b>	100	0
0090011	O	<b>Class 6 4x2 automatic.</b>	0	0
0091260	O	<b>Refuse/recycled material</b>	0	0
0093091	O	<b>Refuse hauler. Vehicles which haul refuse, recycled material, etc. Includes Roll-on/roll-off container movement, as well as hauling refuse from transfer stations to landfills. Typically includes operation in landfills, over rough, uneven surfaces. Road usage: any combination, which includes some Class B.</b>	0	0
0095080	O	<b>Refuse, other</b>	0	0
0098025	O	<b>U.S. Domestic Registry, 50-State</b>	0	0

#### Engine & Equipment

0120325	O	<b>PACCAR PX-7 325 2013 325@2400 315@2600 750@1800.</b> Includes turbo exhaust brake, no code is used. Diagnostic Plug for data link, Oil Cooler, Aluminum Flywheel Housing. N09200 N205 120...Standard Maximum Speed Limit [LSL] N09220 N207 0....Expiration Distance N09240 P09 120...Hard Maximum Speed Limit N09260 P14 65...Maximum Accelerator Pedal Vehicle Speed N09280 P16 0....Accelerator Lower Droop N09300 P19 65...Maximum Cruise Speed N09320 C143 0....Cruise Control Lower Droop N09360 N203 252...Reserve Speed Function Reset Distance N09380 N202 0....Maximum Cycle Distance N09400 N206 10...Maximum Active Distance N09420 N201 0....Reserve Speed Limit Offset N09440 P11 Yes...Engine Protection Shutdown	3,402	0
---------	---	---	-------	---

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/26/2015 12:14:48 PM  
Effective Date: Aug 1, 2014  
Prepared by: Administrator

Complete

Model Number: T300 Series Conventional.  
Quote/DTPO/CO: Q61468327  
Version Number: 34.20



Data	Code	Description	\$ List	Weight
		N09460 P06 No...Gear Down Protection		
		N09480 P26 1400.Max PTO Speed		
		N09500 P02 No...Cruise Control Auto Resume		
		N09520 P04 No...Auto Engine Brake In Cruise		
		N09540 N209 0....Expiration Distance		
		N09560 P520 Yes..Enable Idle Shutdown Park Brake Set		
		N09580 P32 5....Timer Setting		
		N09600 P233 Yes..Enable Impending Shutdown Warning		
		N09620 P234 60...Timer For Impending Shutdown Warning		
		N09640 P516 35...Engine Load Threshold		
		N09680 P33 No...Idle Shutdown Manual Overrule		
		N09720 P230 Yes..Enable Hot Ambient Automatic Overrule		
		N09740 P46 40...Low Ambient Temperature Threshold		
		N09760 P56 60...Intermediate Ambient Temperature Threshold		
		N09780 P47 80...High Ambient Temperature Threshold		
1000155	O	<b>Prospector version 35.0 Supersedes 34.0</b>	0	0
1000684	O	<b>Effective VSL Setting NA</b>	0	0
1000857	O	<b>Engine Idle Shutdown Timer Enabled</b>	0	0
1000891	O	<b>Eff EIST NA Expiration Miles</b> Use only with MX and Cummins engines	0	0
1002060	S	<b>Air compressor: Cummins 18.7 CFM, Cummins, PACCAR</b> PX engines.	0	0
1031130	S	<b>Air Cleaner: Dry-type firewall mounted w/filter</b> restriction indicator.	0	0
1121200	S	<b>Cooling module: 1000 square inches</b> T170/T270/T370/T470. Includes metal surge tank on T170/T270/T370.	0	0
1247190	O	<b>RH under cab SCR for PX-6 / PX-7 w/ single</b> vertical RH SOC tailpipe.	2,071	88
1290136	O	<b>Tailpipe: 5 in. single 36 in. 45 degree curved.</b> For use with any Exhaust other than SCR Independent.	18	1
1323003	S	<b>Fuel filter PACCAR PX-7 engines</b> and Cummins ISB Euro 3 Unheated.	0	0
1816260	S	<b>Alternator: PACCAR 160 amp, brush type</b>	0	0
1821220	S	<b>Batteries: 2 PACCAR GP31 threaded post (700) 1400</b> CCA dual purpose.	0	0
1836100	S	<b>12-VOLT LIGHT SYSTEM W/CIRCUIT PROTECTION</b> <b>Starter: PACCAR 12 volt electrical system. W/</b> centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0	0
1900082	O	<b>Multi-function engine connector for body builder</b> interface for Cummins. T680/T880: This feature is standard, no code required.	41	0

#### Transmission & Clutch

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/26/2015 12:14:48 PM  
Effective Date: Aug 1, 2014  
Prepared by: Administrator

**Complete**

Model Number: T300 Series Conventional.  
Quote/DTPO/CO: Q61468327  
Version Number: 34.20

Data	Code	Description	\$ List	Weight
2011232	O	<b>Transmission: Allison 3500RDS 6-speed</b> w/PTO drive gear, 5th Gen Controls. Limited to 860 lb.-ft. Includes heat exchanger & oil level sensor. Rugged Duty Series for vocational applications. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	9,937	291
2401405	O	<b>Driveline: 2 standard-duty; 1 centerbearing.</b>	548	77
2410018	O	<b>Torque converter included w/Allison</b> Transmission.	0	0
2410061	O	<b>Auto neutral for Allison - single input.</b>	7	0
2410203	O	<b>Allison FuelSense Base: Includes EcoCal, 5th Gen</b> Controls, and Dynamic Shift Sensing	0	0
2429358	O	<b>Rear transmission support springs for</b> transmission PTO applications are required to ensure that engine flywheel housings are not overloaded when transmission PTO's are installed.	62	0
<b>Front Axle &amp; Equipment</b>				
2501002	S	<b>Dana Spicer E-1002I Front Axle rated 10K</b> 3-1/2in. drop.	0	0
2603006	S	<b>Front brakes included w/ front hub package.</b>	0	0
2701000	S	<b>Air Brake: 14,600 lb. package includes</b> Bendix 16-1/2 x5 brakes, cast drums, aluminum 10-bolt hub pilot LMS hubs, hubcaps, oil seals & automatic slack adjusters. For use w/ 22-1/2in. wheels.	0	0
2862090	S	<b>Front Springs: Taperleaf 10K w/ shock absorbers</b> for use on 2010+ chassis w/ 22.5in. wheels only.	0	0
2893071	S	<b>Single power steering gear: 13.2K TRW THP60 for</b> air brakes. Use only w/ 2010+ chassis.	0	0
<b>Rear Axle &amp; Equipment</b>				
3011016	O	<b>Single Dana Spicer S21-170 single reduction rear</b> axle for T300 w/ air brakes. Single rear axle 21K capacity rated at 16K.	920	182
3200614	O	<b>Rear Axle Ratio - 6.14.</b>	0	0
3300000	S	<b>Single rear brakes included w/rear hub package.</b>	0	0
3403003	O	<b>26K air brake package includes 16-1/2x7 in.</b> brakes, cast drums, iron 10-bolt hub pilot hubs, slack adjusters and oil seals for use w/ 22.5 in. wheels.	47	0
3485009	S	<b>Spring Brake: 3030 high output single.</b>	0	0
3495226	S	<b>Bendix 4S/4M anti-lock brake system.</b> N3491 LOCATE THE ABS MODULE AS FAR N3492 FORWARD AS POSSIBLE. NEED N3493 CLEARANCE FOR PTO INSTALL	0	0
3531001	O	<b>Wheel Differential Lock for Dana Spicer Axles</b> S21-170, S21-190, S23-170, S23-190, S26-190 & S30-190; adds D to the end of the axle part number.	819	28

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/26/2015 12:14:48 PM  
Effective Date: Aug 1, 2014  
Prepared by: Administrator

**Complete**

Model Number: T300 Series Conventional.  
Quote/DTPO/CO: Q61468327  
Version Number: 34.20



Data	Code	Description	\$ List	Weight
3636422	O	<b>Rear suspension: single Reyco 79KB taperleaf 23K.</b> Medium-duty. Unladen Height: 9 in. Laden Height: 7.3 in. Not rear air disc brake compatible.	526	57
3836300	O	<b>Rear axle stabilizer bar for Reyco 79KB.</b>	1,029	66
3836315	O	<b>Heavy-duty rear suspension crossmembers for Reyco</b> 79KB replacing T3 standard.	79	41
<b>Tires &amp; Wheels</b>				
4038653	O	<b>Front tires: Goodyear G661 HSA 11R22.5 16PR.</b> 41.8 in. diameter, all position. 19.5 in. SLR.	-7	16
4238810	O	<b>Rear tires: 2 Goodyear G751 MSA 12R22.5 16PR</b> 42.0 in. diameter. Steer/all position on/off highway tire. 20.3 SLR.	996	128
4900004	O	<b>Rear Tire Quantity: 4</b>	0	0
5042299	U	<b>FR whl:Accuride 50344PW 22.5x8.25 HD</b>	66	26
5242299	U	<b>RR Whl:Accuride 50344PW 22.5x8.25HD</b>	132	52
5900004	O	<b>Rear Wheel/Rim Quantity: 4</b>	0	0
<b>Frame &amp; Equipment</b>				
6054250	O	<b>Frame Rails: 10-5/8 x 3-1/2 x 5/16 in. Steel to</b> 308 in. Truck frame weight is 2.91 lb.-in. per pair of rails. Section modulus is 14.80 cu.in., RBM is 1,776,000 in.-lbs per rail. 120,000 PSI yield. Heat treated. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	0	70
6141450	O	<b>Full Steel Insert for 10-5/8 in. or 10-3/4 in.</b> main rail. Insert length is 168 - 348 in. Adds 1,149,000 in.-lb to main rail RBM. Insert weight is 2.05 lb.-in. per pair of rails. Insert length is equal to wheelbase plus rear frame cutoff plus 20.7 in. forward of front axle.	1,551	459
6308710	S	<b>Bumper: Aerodynamic, Painted. Requires a</b> bumper setting code.	0	0
6319409	S	<b>40.9 in. Bumper setting. Requires a bumper code.</b>	0	0
6321005	O	<b>Removable Front Tow Hooks: 2.</b>	248	15
6390103	S	<b>Front mudflaps.</b>	0	0
6391001	O	<b>Custom Frame Layout: one chassis</b>	1,000	0
6400636	O	<b>Battery box cantilever aluminum BOC w/</b> fiberglass cover.	27	0
6409901	O	<b>Battery box location: LH Side.</b>	0	0
6451059	O	<b>T270/370 Non-polished 2010 DPF/SCR cover: w/cab</b> access step assembly, RH under.	0	0
6490430	O	<b>One bolted rear cab crossmember: Replacing T3</b> standard.	111	17
6742009	S	<b>Square end-of-frame w/ o crossmember;non-towing.</b>	0	0

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/26/2015 12:14:48 PM  
Effective Date: Aug 1, 2014  
Prepared by: Administrator

Complete

Model Number: T300 Series Conventional.  
Quote/DTPO/CO: Q61468327  
Version Number: 34.20



Data	Code	Description	\$ List	Weight
<b>Fuel Tanks &amp; Equip</b>				
7210056	O	Fuel Tank: 56 US gallon 24.5in. aluminum under replace.	240	-45
7722011	O	Small round DEF tank. 11 gallons of useable volume. The DEF tank will be located on the side you specified, but will not be displayed in the Prospector graphic. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Required capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel re-fillings for every DEF re-filling.	241	0
7889604	O	DEF tank location is on the LH.	0	0
7920056	O	Location: 56 gal fuel tank LH under cab	0	0
<b>Cab &amp; Equipment</b>				
8024310	S	<b>Cab: Curved Glass Conventional.</b> Cab Includes aluminum & fiberglass fully hucked cab w/ all aluminum bulkhead doors & continuous stainless steel piano-style door hinges. Single electric horn standard. Incandescent exterior lights include diagnosable bulb detection and warning. Trailer cable on tractors includes integrity detection. Standard features include multiplex wiring for interior lights, automated pre-trip inspection, short and open check diagnostics. Warning alarm will sound when lights are left on.	0	0
8090310	S	<b>Hood: Sloped aerodynamic hood includes</b> grill & separate bumper.	0	0
8108010	S	<b>Cab heater: W/integral defrosters &amp; A/C 45,000</b> btu cab heater. No sleeper heater/AC. Includes 5 mode rotary control. T660 include filter media.	0	0
8201200	O	<b>Adjustable telescoping tilt steering column.</b>	401	10
8203060	O	<b>5 sets of keys. Replaces standard 2 sets of keys.</b>	26	0
8208495	O	<b>Two spare switches: Wired to power.</b>	46	0
8282009	S	<b>Instrument package: Includes speedometer,</b> tachometer, fuel gauge, engine coolant temperature gauge, engine oil pressure, voltmeter. Class 8 also includes primary & secondary air reservoir gauges & an air application gauge. DEF level gauge and warning lamp are included with 2010+ engines. Engine hour meter and outside air temperature readouts are standard. Primary read out will be MPH. Add 8240620 to switch primary scale to KPH in Canada.	0	0
8330003	S	<b>Cab interior: Pinnacle. Includes vinyl headliner</b> & cab back panel, slate gray interior, dark slate gray seats, floormats, LH/RH inside sunvisor & door courtesy lights.	0	0

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/26/2015 12:14:48 PM  
Effective Date: Aug 1, 2014  
Prepared by: Administrator

**Complete**

Model Number: T300 Series Conventional.  
Quote/DTPO/CO: Q61488327  
Version Number: 34.20



Data	Code	Description	\$ List	Weight
8410191	O	<b>Driver seat: Kenworth Air cushion Plus HB vinyl.</b> Standard features includes 7 in. fore and aft slide adjustment w/isolator, 6-23 degree recline, air suspension with cover, dual armrests, and single chamber air lumbar support. Seat cushion is 20 inches wide w/ 2-position tilt and 2-position front cushion extension. Seat material has a horizontal stitch pattern and is 2-tone in color. Seat back is carpeted and includes a map pocket. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Black seat belts for T700, gray on all other models.	128	2
8478330	O	<b>Rider seat: 2 man bench vinyl.</b> Standard features include 34.5 in. wide 2-tone seat cushion w/ fixed base. Armrests are not available. Seat back is carpeted. Includes inside visor and retractable 3-point matching seat belts. Black seat belts for T700, gray on all other models.	443	61
8496559	O	<b>Driver and Rider Seat Belts: Orange Seat Belts.</b> Replacing standard color.	38	0
8601421	O	<b>Kenworth Radio with AM/FM/WB/USB and Bluetooth</b>	322	4
8699913	O	<b>Dash-mounted CB assembly: Includes bracket &amp; binding posts.</b> Dual antenna leads located on mirror bracket.	126	4
8700154	O	<b>Self cancelling turn signal: W/head light dimmer switch.</b>	21	0
8800200	S	<b>Cab access contoured grabhandles, LH/RH.</b>	0	0
8832115	O	<b>DAYLITE DOOR: LH/RH INCL RH PEEPER WINDOW</b>	0	0
8850210	S	<b>Dual convex mirrors 7-1/2 in. w/ offset mounting,</b> and non-heated.	0	0
8850300	S	<b>Single convex mirror 8-1/2 in. x 4-7/16 in.</b> located on rider side, and non-heated.	0	0
8850817	O	<b>Dual convex mirror 8 in. fender mounted,</b> and non-heated.	192	8
8862101	S	<b>Mirror: Dual Prutsmann mirror 7 in. x 16 in.</b> polished stainless steel, and non-heated.	0	0
8869005	S	<b>Mirror brackets 8-1/2 ft load width.</b>	0	0
8871438	S	<b>Rear Cab Stationary Window 17 in. x 36 in.</b>	0	0
8879200	S	<b>Manual LH &amp; electric-powered RH door window.</b> Switch located on door.	0	0
<b>Lights &amp; Instruments</b>				
9010801	S	<b>Headlamps: Halogen Projector Low Beam, Halogen</b> Complex Reflector High Beam	0	0
9022137	O	<b>Marker Lights: Five, rectangular, LED</b>	86	0
9030010	S	<b>Turn Signal Lights: Mounted on fender</b>	0	0
9070138	S	<b>Combination Stop, Tail, Turn &amp; Backup Lights RH &amp; LH.</b>	0	0

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/26/2015 12:14:48 PM  
Effective Date: Aug 1, 2014  
Prepared by: Administrator

**Complete**

Model Number: T300 Series Conventional.  
Quote/DTPO/CO: Q81468327  
Version Number: 34.20






Kenworth of Central Florida K680  
1800 North Orange Blossom Trail

CITY OF ORLANDO  
1010 South Westmoreland Drive

Orlando, Florida United States 32804  
Phone:  
Fax:  
Email:

Orlando, Florida United States 32805  
Phone: (407) 719-5549  
Fax:  
Contact Email:  
Prepared for: Daryl C Greenlee

## Fuel Tanks

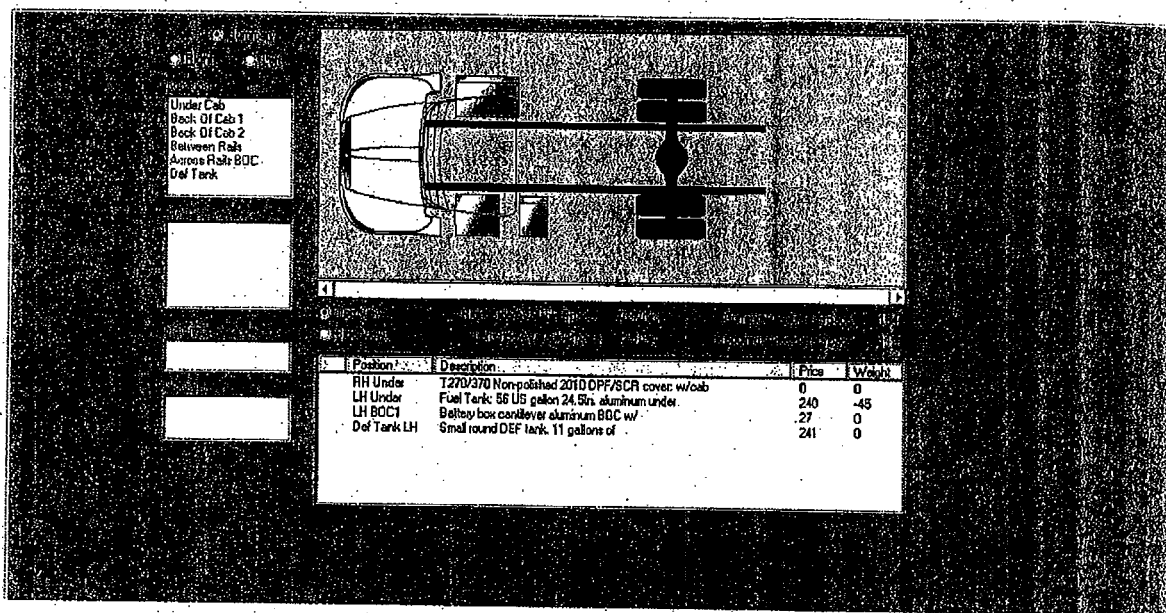

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/28/2015 2:31:40 PM  
Effective Date: Aug 1, 2014  
Prepared by: Administrator

**Incomplete**

Model Number: T300 Series Conventional.  
Quote/DTPO/CO: Q11568184  
Version Number: 34.20




Kenworth of Central Florida K680  
1800 North Orange Blossom Trail

CITY OF ORLANDO  
1010 South Westmoreland Drive

Orlando, Florida United States 32804  
Phone:  
Fax:  
Email:

Orlando, Florida United States 32805  
Phone: (407) 719-5549  
Fax:  
Contact Email:  
Prepared for: Daryl C Greenlee

## Horizontal Dimensions

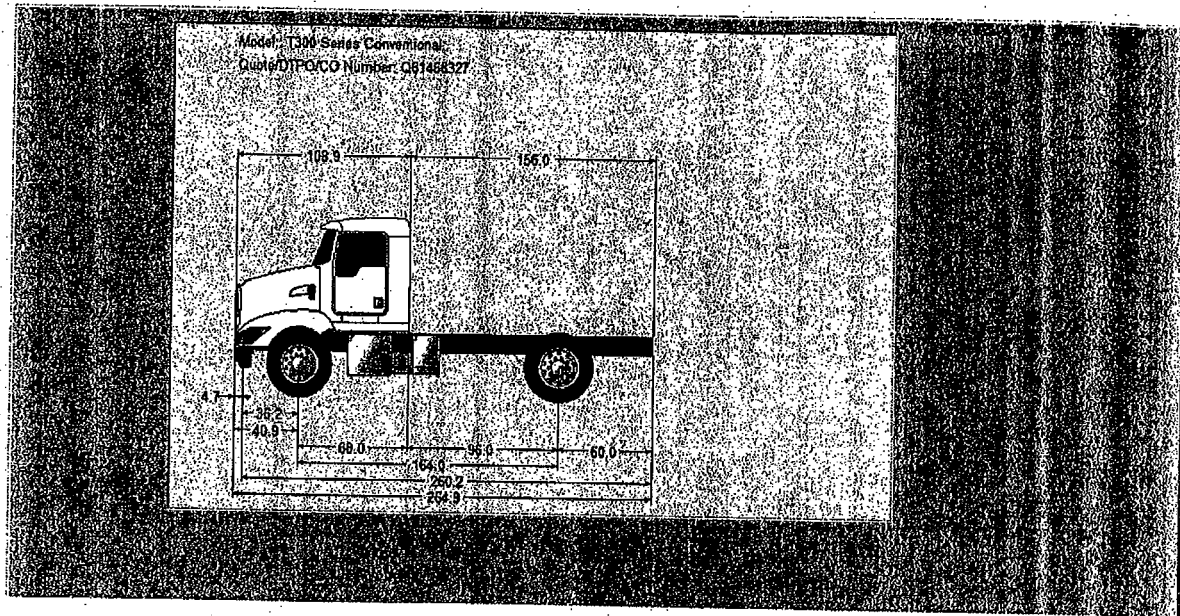

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/26/2015 12:15:00 PM  
Effective Date: Aug 1, 2014  
Prepared by: Administrator

**Complete**

Model Number: T300 Series Conventional.  
Quote/DTPO/CO: Q61468327  
Version Number: 34.20



THE WHEELS ARE ALWAYS TURNING

## QUOTATION

**Prepared For:**

BIDDERS  
Florida Sheriffs Association

**Ship To:**

Florida Truck Dealer

**Prepared By:**

Sunbelt Waste Equipment  
Tampa Crane  
Ingram Equipment

QUOTE REFERENCE NUMBER	ISSUE DATE	VALID FOR	EST. DELIVERY FROM RECEIPT OF ORDER	SUBMITTED BY	SHIPPED VIA	FOB POINT	TERMS
ASL-2014FSA	10-1-2013	1 Year	TBD at Time of Order	HEIL DEALERS	DRIVE AWAY	DEALER	NET 30 DAYS

**Body****HEIL 4000 13 YARD BODY****Standard Options**

Direct mount gear pump  
Hot shift PTO  
Hopper work light  
Body side assist lights  
Peterson multi-function lights  
¾" overlay floor (150,000 PSI)  
Body side access door with step  
Brigider camera withn monitor  
20 lb fire extinguisher  
Rear mud flaps  
Five year extended cylinder warranty  
One (1) Bayne MSTL 180 cart flipper  
Freight from Ft. Payne  
Net price

Total Body and Options  
Quote Per Unit

\$111,394.00

**THANK YOU FOR THE OPPORTUNITY TO QUOTE!**

If you have any questions concerning this quotation, please feel free to contact us.

Andrew J. Solo  
Tampa Crane & Body  
813-323-2585 cell  
888-922-7263 toll free