

May 18, 2015

Reg 3144

Kenworth of Central Florida
1800 N. Orange Blossom Trail
Orlando, FL. 32804
407-425-3170 Ext 106
Prepared by: Rich Sgueglia

City of Orlando
1010 South Westmoreland drive
Orlando, FL 32805
407-719-5549
Prepared for: Daryl Greenlee

Florida Sheriffs Bid 14-12-0904
Spec # 14 - 52,000lb GVW Truck
(1) Kenworth T800 Cab and Chassis
(1) Kenworth T880 Upgrade

Code	Bid Specification – Options	Price	Extension
Base Specification	2015 Kenworth T800 truck	102,565.00	102,565.00
70060	T880 Cab	3,960.00	3,960.00
125805	ISX12-G 400hp 1,450 ft/lb	25,484.00	25,484.00
OPTION #1	(1) 45DGE tank and (1) 30DGE tank CNG SYSTEM	47,250.00	47,250.00
2015158	Allison 4500RDS Transmission	14,103.00	14,103.00
6141600	Double Frame: full steel insert	1,758.00	1,758.00
2506181	Front Axle: 20,000 lb. Rating	5,132.00	5,132.00
3144172	Rear Axle: 46,000 lb. Rating	2,197.00	2,197.00
		0.00	0.00
		0.00	0.00
3532194	Driver controlled differential lock	1,531.00	1,531.00
5207B	Palfinger PK 26002EH Knuckleboom Crane	159,386.00	159,386.00
	With 18' Dump Body	0.00	0.00
		0.00	0.00
AUTLUBE	Autolube system lube core	7,304.00	7,304.00
Telma	Telma on CNG T880 Chassis	11,990.00	11,990.00
		0.00	0.00
WT	Window Tint	152.00	152.00
224095	Warranty: ISX-G 5yr/150K PP1	2,116.00	2,116.00
4500yr	Allison 5 year Warranty	754.00	754.00
		0.00	0.00
Note: All Options			
Reference: Kenworth Specs Pages: 513 – 519			
Total price		\$385,682.00	\$385,682.00

Kenworth of Central Florida K680
1800 North Orange Blossom Trail

CITY OF ORLANDO
1010 South Westmoreland Drive

Orlando, Florida United States 32804
Phone:
Fax:
Email:

Orlando, Florida United States 32805
Phone: (407) 719-5549
Fax:
Contact Email:
Prepared for: Daryl C Greenlee


Vehicle Summary

	Unit	Chassis	
Model:	T880 Series Conventional	Fr Axle Load (lbs):	20000
Type:	FULL TRUCK	Rr Axle Load (lbs)	46000
Description:	T880 Tandem	G.C.W. (lbs):	66000
	Application	Road Conditions:	
Intended Serv.:	Refuse packer. Vehicles which pick up refuse or	Class A (Highway)	15
Commodity:	Refuse/recycled material	Class B (Hwy/Mtn)	85
		Class C (Off-Hwy)	00
	Body	Class D (Off-Road)	00
Type:	Refuse loader/packer	Maximum Grade:	6
Length (ft):	30.0	Wheelbase (in):	255
Height (ft):	13.5	Overhang (in):	68
Max Laden Weight (lbs):	4000	Fr Axle to BOC (in):	68
		Cab to Axle (in):	187
	Trailer	Cab to EOF (in):	255
No. of Trailer Axles:	0	Overall Comb. Length (in):	364
Type:			
Length (ft):	0.0	Special Req.	
Height (ft):	0.0	U.S. Domestic Registry, 50-State	
Kingpin Inset (in):	0		
Corner Radius (in):	0		
	Restrictions		
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

	Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com .
	PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:
Effective Date:
Prepared by:

5/18/2016 12:29:49 PM
Aug 1, 2014
Administrator

Complete

Model Number:
Quote/DTPO/CO:
Version Number:

T880 Series Conventional
Q22868563
34.40

KENWORTH

Kenworth of Central Florida K680
1800 North Orange Blossom Trail

CITY OF ORLANDO
1010 South Westmoreland Drive

Orlando, Florida United States 32804
Phone:
Fax:
Email:

Orlando, Florida United States 32805
Phone: (407) 719-5549
Fax:
Contact Email:
Prepared for: Daryl C Greenlee

Data	Code	Description	\$ List	Weight
Model				
0000810	O	T880 Series Conventional	151,320	15,312
0070032	O	T880 ISX12G Engine	0	0
0080085	O	CARB Idle - Alternative fuel exempt from CARB anti-idle.	0	0
0090048	O	T880 Non Sleeper ISX12G Engine.	0	0
0091260	O	Refuse/recycled material	0	0
0093095	O	Refuse packer. Vehicles which pick up refuse or recycled material from curbside containers in residential areas. Operation typically includes very frequent stops & starts. Unloading can be at transfer station or at landfill. Road usage: some Class B required, with maximum of 5% Class D.	0	0
0095070	O	Refuse loader/packer	0	0
0098025	O	U.S. Domestic Registry, 50-State	0	0

Engine & Equipment

0125805	O	ISX12 G 400 2013 400@1800 1450@1100,	37,523	-55
Gov@ 2100 Diagnostic Plug for data link, Oil Cooler, Aluminum Flywheel Housing. Includes Coolant Loop for fuel system.				
N09200 N205 120..Standard Maximum Speed Limit[LSL]				
N09220 N207 0....Expiration Distance				
N09240 P13 120..Hard Maximum Speed Limit				
N09260 P14 64...Maximum Accelerator Pedal Vehicle Speed				
N09280 P16 0....Accelerator Lower Droop				
N09300 P19 65...Maximum Cruise Speed				
N09320 P38 0....Cruise Control Lower Droop				
N09360 N203 252..Reserve Speed Function Reset Distance				
N09380 N202 0....Maximum Cycle Distance				
N09400 N206 0....Maximum Active Distance				
N09420 N201 0....Reserve Speed Limit Offset				
N09440 P11 Yes..Engine Protection Shutdown				
N09460 P06 No...Gear Down Protection				
N09480 P26 1400.Max PTO Speed				
N09500 P02 No...Cruise Control Auto Resume				
N09520 P04 No...Auto Engine Brake in Cruise				
N09540 N209 0....Expiration Distance				
N09560 P520 Yes..Enable Idle Shutdown Park Brake Set				
N09580 P32 5....Timer Setting				
N09600 P233 Yes..Enable Impending Shutdown Warning				

N09620 P234 60...Timer For Impending Shutdown Warning
 N09640 P516 35...Engine Load Threshold
 N09680 P33 No...Idle Shutdown Manual Override
 N09720 P230 Yes..Enable Hot Ambient Automatic Override
 N09740 P46 40...Low Ambient Temperature Threshold
 N09760 P56 60...Intermediate Ambient Temperature Threshold
 N09780 P47 80...High Ambient Temperature Threshold

1000155	O	Prospector version 35.0 Supersedes 34.0	0	0
1000684	O	Effective VSL Setting NA	0	0
1000857	O	Engine Idle Shutdown Timer Enabled	0	0
1000859	O	Enable EIST Ambient Temp Override	0	0
1000860	O	Enable EIST In PTO Mode Use only with MX and Cummins engines	0	0
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0	0
1002060	O	Air compressor: Cummins 18.7 CFM, Cummins, PACCAR PX engines.	0	0
1051200	S	Air Cleaner: composite firewall mounted PACCAR or Cummins engines	0	0
1123555	S	Cooling module: 1330 square inches. On-off fan hub, nylon fan blade, translucent top tank, air-to-air heat exchanger/aftercooler, silicone hoses w/constant torque clamps, long life coolant.	0	0
1160208	O	Radiator bug screen mounted between hood & grille.	112	2
1247016	O	Exhaust: single horizontal catalytic CNG single horizontal tailpipe.	0	0
1323059	O	Rail mounted Natural Gas fuel filter For spark ignited ISL9G and ISX12G engines	0	0
1504005	O	Immersion block heater 120V 1500W w/plug under door on T700, C500, T660, T800 & W900.	96	2
1816200	O	Alternator: Bosch 200 amp, brush type	136	0
1821275	O	Batteries: 3 AGM GP31 THR (925) 2775 CCA. For T680 & T880 in cab battery box only.	362	0
1836100	S	Starter: PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0	0
1900082	O	Multi-function engine connector for body builder interface for Cummins. T680/T880: This feature is standard, no code required.	54	0
1900976	O	Body builder harness to EOF for customer installed remote throttle control. This does not include J1939 harness for communicating with 2010 engines. Requires either code 1900082 or 1900084.	73	2

Transmission & Clutch

2016158	O	Transmission: Allison World 4500RDS 6-speed w/o retarder, w/PTO provision. 5th generation. For vocational applications. Includes shift control, transmission oil temperature gauge, oil level sensor & heat exchanger. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	24,253	385
2405427	O	Driveline: 4 heavy-duty 3 centerbearing. N2400 A Telma Driveline Retarder N2401 will be Installed.	2,608	291

2410018	O	Torque converter included w/Allison Transmission.	0	0
2410151	O	Pushbutton control center console mounted. Class 8 with Allison Transmission.	0	0
2410203	O	Allison FuelSense Base: Includes EcoCal, 5th Gen Controls, and Dynamic Shift Sensing	0	0
2410244	O	J1939 Park Brake Auto Neutral	0	0

Front Axle & Equipment

2506181	O	Dana Spicer D2000 Front Axle rated 20K standard track.	2,179	150
2621078	O	Front Brakes: 22K Bendix ES S-cam 16.5x6 in.	-341	-56
2690035	O	Front Brake Drum: 22,000 lbs. 16-1/2x6 in. Cast.	-105	103
2702020	O	Front Hubs Iron hub pilot 20,000 lbs. 10 Bolt 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle. Consider Wheelguards (5850002) with aluminum wheels.	278	86
2741970	S	ConMet PreSet Plus Hub package; front axle.	0	0
2750001	S	Hubcap: front vented.	0	0
2765001	O	Front Auto Slack Adjuster.	0	0
2866020	O	Front Springs: Taperleaf 20K w/ shock absorbers w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins except for C500 which has threaded pins. W900S only. Not available on W900L. W900B use 2866021.	1,101	234
2895302	O	Dual power steering gear: 16-22K Sheppard HD94. Heavy duty. Not for use on T3.	1,064	73
2899336	O	Power Steering Cooler: Radiator mounted air to oil 2007+ engines only. 2899362 is optional w/ 2006 or 2007 engines.	323	11
2900616	O	Threaded Bushings for taperleaf spring 16K, 18/20K, 22K, 40K replacing rubber.	99	0

Rear Axle & Equipment

3144172	O	Dual Dana Spicer D46-170H rear axle rated at 46K. w/ 16mm housing and 2.06in. shaft diameter. Tandem rear axles.	3,387	577
3200557	O	Rear Axle Ratio - 5.57.	0	0
3334004	S	Dual Rear Brakes 16-1/2x7 in. to 46K; Bendix ES-extended service S-cam.	0	0
3392005	S	Dual Rear Brake Drums: cast.	0	0
3407050	S	Dual Rear Hubs: Aluminum hub pilot 46K 11-1/4 in. bolt circle.	0	0
3441972	S	ConMet PreSet Plus Hub package; dual rear axle.	0	0
3465002	S	Dual Rear axle automatic slack adjusters.	0	0
3485209	S	Spring Brake: 3030 high output dual.	0	0
3495226	S	Bendix 4S/4M anti-lock brake system.	0	0
3532194	O	Wheel Differential Lock for Dana Spicer axles D40-170(P)/D46-170(H)(P)(WT) forward rear axle & rear rear axle.	2,235	112
3573111	O	Separate switch for dual axles: differential lock or crosslock.	103	0
3749209	O	Rear suspension: Tandem Chalmers 854-46-H 46K. 54 in. axle spacing. Unladen Height: 12.5 in. Laden Height: 10.1 in. Standard restrictor can.	4,122	110
3832026	O	Chalmers shock absorbers. 52K and under suspension.	446	35

Tires & Wheels

4038722	O	Front tires: Goodyear G296 MSA DuraSeal	855	148
		425/65R22.5 20PR. 44.4 in. diameter 20.6 in. SLR. all position. On/Off highway. Wide-base tire.		
4238810	O	Rear tires: 2 Goodyear G751 MSA 12R22.5 16PR	2,204	288
		42.0in. diameter. Steer/all position on/off highway tire. 20.3 SLR.		
4900008	O	Rear Tire Quantity: 8	0	0
5045216	O	Front wheel: Alcoa 82362 22.5x12.25 aluminum,	733	-10
		with Lvl One [TM] finish, hub pilot mount. 11400lb. maximum rating. Super single. Standard track axles may be over 102 in. w/425 tires. Air disc brake compatible.		
5242285	O	Rear wheel: Accuride 50344 22.5x8.25 steel	316	104
		Steel Armor[TM] powder coat, hub pilot mount. Heavy-duty 5 hand-hole hub pilot mount. Code is priced per pair of wheels.		
5900008	O	Rear Wheel/Rim Quantity: 8	0	0

Frame & Equipment

6056600	O	Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 337in.	760	501
		to 416 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail. N6050 Outside Clear Frame Both Sides N6051 From Rear Under Cab Components N6052 To front Tandem Axle		
6141600	O	Full Steel Insert: for 10-5/8 in. or 10-3/4 in.	1,844	705
		Steel 337 in. to 416 in. or 2nd insert for 11-5/8 in. steel frame. Adds 1,149,000 in.-lb to main rail RBM. Truck insert weight is 2.05 lb.-in. per pair of rails. Full frame insert length is equal to wheelbase plus rear frame cutoff plus dimension forward of front axle by model: T700, T660 and T800 = 21.26 in., C500B = bumper setting minus 0.79 in., W900B = 5.27 in., W900L = 1.50 in., W900S = 3.27 in., T440/T470 50 in. bumper setting = 21.26 in., T470 73 in. bumper setting = 72.3 in.		
6301610	O	Bumper: Stainless steel Clad straight aluminum	148	-11
		channel. Requires bumper setting code.		
6319485	O	48.5 in. Bumper setting. Requires a bumper code.	0	0
6321005	O	Removable Front Tow Hooks: 2.	257	15
6390103	S	Front mudflaps.	0	0
6391201	O	Custom Frame Layout: one chassis	1,200	0
		N6394 Clear Frame Space Required N6395 From Back of Cab to Front of N6396 Tandem Axle Both Sides.		
6397001	O	Huck bolts throughout frame, where possible.	227	0
6405000	O	In-cab steel battery box: under rider seat or in	1,702	-9
		stand alone box. Requires appropriate AGM battery code, which varies by model, and appropriate rider seat code be selected prior to entering the workscreen. Includes 1 battery disconnect switch.		
6409906	O	In-Cab battery box location: Under rider seat.	0	0
6417002	O	Cab access step: RH under mounted to frame.	510	66
6418002	O	Cab access step: LH under mounted to frame.	510	66
6479902	O	Toolbox location: RH side.	0	0
6479905	O	Second toolbox location: LH side.	0	0
6721102	S	Rear mudflap arms: Betts B-25 standard-duty,	0	0

		straight. Includes B1732 mounting brackets as standard.		
6722000	S	Rear mudflap shields: White plastic antisail w/ Kenworth logo.	0	0
6741011	O	Square end-of-frame w/ crossmember; non-towing.	202	30
Fuel Tanks & Equip				
7210000	O	Delete base model gallon aluminum fuel tank. Hardware & plumbing deleted.	-1,070	-114
7884054	O	CNG/LNG Frame Rail Mounted Tank	0	0
7940000	O	Delete Standard Fuel Tank Location for use with CNG fuel system only	0	0
Cab & Equipment				
8025301	S	Cab: Stamped aluminum cab with panoramic curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0	0
8090605	S	Hood: T880 MX 116.7 inch BBC Fastened Fasteners.	0	0
8108011	S	Daycab HVAC system with defrost, A/C, and 48,000 BTU/hr heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter & cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation.	0	0
8201013	S	Steering wheel: 18 in. 4-spoke.	0	0
8201200	O	Adjustable telescoping tilt steering column.	0	0
8203080	O	5 sets of keys. Replaces standard 2 sets of keys.	26	0
8208496	O	Three spare switches: Wired to power.	92	0
8225658	O	Gauge: Axle oil temperature, dual-drive axle. (2 gauges) w/integral warning light.	112	0
8282016	O	KW Instr. PKG With 8 STD Gauges, For Natural Gas No Def Gauge, Fuel Gauge Without ULSD Text. ULSD is Ultra Low Sulfur Diesel Fuel.	0	0
8282107	O	Large flat panel on dash For customer-installed controls. Reduces gauge count by 6.	38	0
8300008	S	Interior color: Slate Gray	0	0
8330102	S	Interior package: Vantage daycab Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0	0
8410200	O	DR Seat: GT701 HB with Vinyl material. The GT701 is standard with a single air bag, scissor linkage seat suspension. It includes a single chamber lumbar support, 10in Fore/Aft adjustment, 7in Up/Down adjustment, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	-75	0
8480110	O	RD Seat:GT100 Battery/Utility Box HB With Vinyl Material. The GT100 seats are standard with fixed base. Includes 3-point	-153	20

matching seat belts.

8490187	S	Seat color: Slate Gray with Gray stitching.	0	0
8496559	O	Driver and Rider Seat Belts: Orange Seat Belts. Replacing standard color.	29	0
8601421	O	Kenworth Radio with AM/FM/WB/USB and Bluetooth	395	4
8699826	O	CB Installation kit: Center mounted of header. W/header mounted quick release CB mount. One red power post & one black ground post. Includes dual antenna leads located on the mirror brackets. Includes dual antenna & separate speaker.	230	2
8700168	S	Non-self cancelling turn signal: W/column-mounted headlight dimmer switch & intermittent wiper control.	0	0
8800402	S	Dual cab-interior grabhandles: a-pillar mounted dash-wrap and b-pillar mounted grabhandles	0	0
8832113	S	Kenworth Daylite Door with standard LH/RH electric door locks and LH/RH electric window controls.	0	0
8841618	O	Dual rectangular air horn 23 in. LH & RH top of roof. Includes air horn covers.	191	4
8850139	S	Convex look-down mirror. Single 11in X 6in mounted to passenger door with black housing. Non-Heated.	0	0
8850814	O	Dual convex mirrors 8in. hood mounted. Chrome AERO-style. LH/RH, and non-heated. T680/T880: Use code 8850144 to delete downward looking mirror over RH door when desirable.	264	9
8865002	S	Aero Mirror: Dual Kenworth aerodynamic motorized heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0	0
8871446	S	Rear cab stationary window 19in x 36in	0	0
8890101	S	One-piece bonded-in windshield with curved glass. Standard.	0	0
8890135	O	Exterior stainless steel sunvisor.	754	19
8890348	O	Wheelwell Fender Extension: 4.5 inches	239	0
8890876	S	Kenworth cab/sleeper air suspension.	0	0

Lights & Instruments

9010553	S	Headlamps: SAE Dual Halogen Complex Reflector	0	0
9022137	S	Marker Lights: Five, rectangular, LED	0	0
9030016	S	Turn Signal Lights: Flush mounted LED mounted at top of fender wheel arc	0	0
9030052	S	LED Stop, Turn, Tail: Flange Mounted With Two LED backup lights and with an LED license plate.	0	0
9080128	O	Dual Revolving Amber Roof Lights: Centered over cab door w/ stainless steel bracket.	622	15
9090039	S	Marker Lights: Interrupter switch. Included in Turn Signal for all models except T3. The T3 switch is in the dash.	0	0
9090126	O	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	135	4

Air Equipment

9101230	O	Air Dryer: Bendix AD-1S Extended Purge heated.	144	4
9108001	S	Moisture ejection valve w/ pull cable drain.	0	0
9140020	S	Nylon air tubing in frame & cab, excluding hoses subject to excessive heat or flexing.	0	0

Extended Warranty

9200021	S	Standard Warranty.	0	0
9206346	O	CumminsEW: Protect Plan 1 2013 ISX12G 5 Yrs/150K 160,935KM	2,100	0

Miscellaneous

9400071	O	Specify Ship Destination by Narrative. N9400 Ship Chassis to: Ring Power N9401 Ocala 1600 NW63rd St N9402 Ocala FL	0	0
9409852	O	GHG Secondary Manufacturer: Does Not Apply	0	0
9490003	O	Additional lead time required for off highway & /or specialty component truck.	0	0
9490206	O	Warning triangle reflector kit: Shipped loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	41	4
9490408	O	One 5 lb. dry chemical type fire extinguisher mounted inboard of rider seat. Class ABC.	123	11

Paint

9700000	O	Paint color number. N97020 A - L0006EB WHITE B/C N97200 FRAME N0001EA BLACK	0	0
9943004	O	Bumper Unpainted	0	0
9943119	S	Imron solid 1 color non-sleeper Spec A. Will be White L0006EB if no other color specified.	0	0
9965510	S	Base coat/clear coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

Total Adjusted Price (W/O Freight & Warranty & Surcharges)	\$245,032
Freight Charge	\$2,125
Options Not Subject to Discount	\$2,100
Surcharges Not subject to Discount	\$0
Total Weight	19249


Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	5/18/2015 12:29:49 PM	Complete	Model Number:	T880 Series Conventional
Effective Date:	Aug 1, 2014		Quote/DTPO/CO:	Q22888563
Prepared by:	Administrator		Version Number:	34.40

CRANE: PK 26002-EH E
 CONFIG.: F-RRC R2X STZY TL200
 ADD.SUPP.: -
 TRUCK: KENWORTH T880

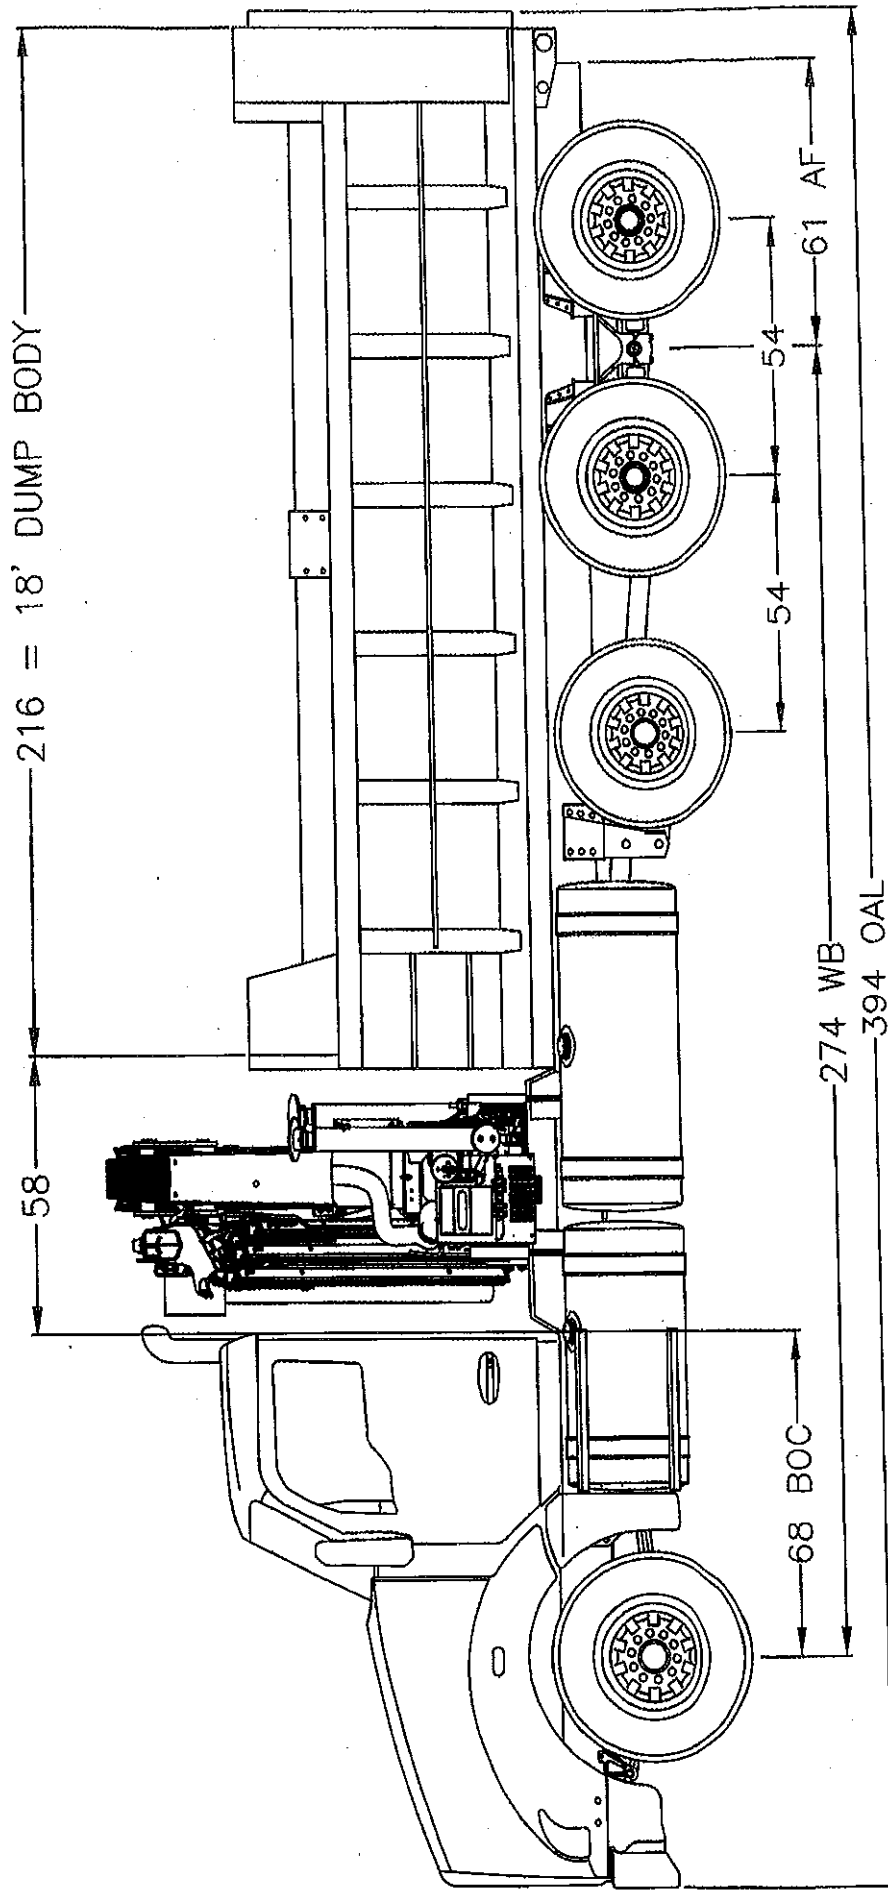

PALFINGER

PRELIMINARY SKETCH

DATE:	DRAWN BY:	PROJECT / DWG NO:	SHEET:
MAY 7/15	M.P.	8741G	1 OF 1

REVISION CONTROL

REV.	CHANGE	DATE:
1	ISSUE	MAY 7/15
2		
3		

PRELIMINARY SKETCH ONLY.
 SEE COVER LETTER/EMAIL FOR
 PRELIMINARY WEIGHT DISTRIBUTION AND
 STABILITY RESULTS.
 ALL INFORMATION PROPERTY OF PALFINGER.



Rich Sgueglia - Kenworth of Central Florida
(75DGE and 90DGE) Gen4 CNG Rail Mount System
System to be installed on a Kenworth T880

Special configuration

Option #1

30 DGE (Gen4) CNG Systems mounted on the drivers rail

45 DGE (Gen4) CNG Systems mounted on the curbside rail

Front Bumper time fill

integrated FMM w/fast fill, time fill and de-fuel located on the street side

Inbound Freight Charge

\$18,167.01

\$20,412.37

\$1,250.00

\$4,669.00

\$750.00

Total includes installed at Agility or ProBilt Chillicothe, OH.

\$45,248.38 per chassis

(1) 30DGE tank on drivers rail)

Requires 70" clear rail

(1) 45DGE tank on the curbside rail)

Requires 104" clear rail

→ Exhaust must run on the inside of frame rails

→ Air tanks, Dyer, and Battery box must be ran inside the rails

→ Chassis frame rails must be pre drilled from factory

1/2" stainless Steel plumbing Standard

Approximately 68DGE usable **(Slow Fill)**

Approximately 58DGE usable **(Fast Fill)**

Estimated full weight 1400#

12-14 week delivery ARO (after receipt of order)

5/13/2015

Jeff Scott

rev-3

Page 1

PHS-2013-0001, released under the President John F. Kennedy Library Act. For more information, see <http://www.jfklibrary.org/About-JFKL/Records-Management/PRES-2013-0001.aspx>

(2) 30DGE (tank on drivers rail)

(1) 30DGE tank on the curbside rail.

12-14 week delivery ARO (after receipt of order)

***All side mounts will be painted Agility White unless other wise specified on your purchase order

***Shipping

Freight included for system to be shipped to installation location

Price valid for 90 Days

***Delivery

12-14 Week Delivery ARO (After Receipt of Order)

***Pricing

Price does not include applicable taxes

FET is the dealers responsibility

Other options and pricing

	Price	
Non Standard/Metallic Paint →	\$1,500.00	per chassis
Opposite side fill installed on Back of Cab system	N/A	per chassis
25" De-Fuel /Transfer Hose P/N 20100021	\$1,650.00	each
Un-decking charge per truck	\$175.00	
Freight Charges	Included	
Fueling charge is \$3.25 per gallon (Must Be Noted on P.O.)	Not Available	

*****System Freight Charge is included in the pricing listed above**

"Truck Delivery is NOT"***

Chassis rails must be pre drilled by factory or an additional \$1,200. per chassis will be charged

rev-2

added option #2 dual 30DGE rail mounts on the driverside and a single 30DGE on the curbside
Added time fill front bumper fill to both option #1 and #2

5/11/2015

Jeff Scott

rev-3

