

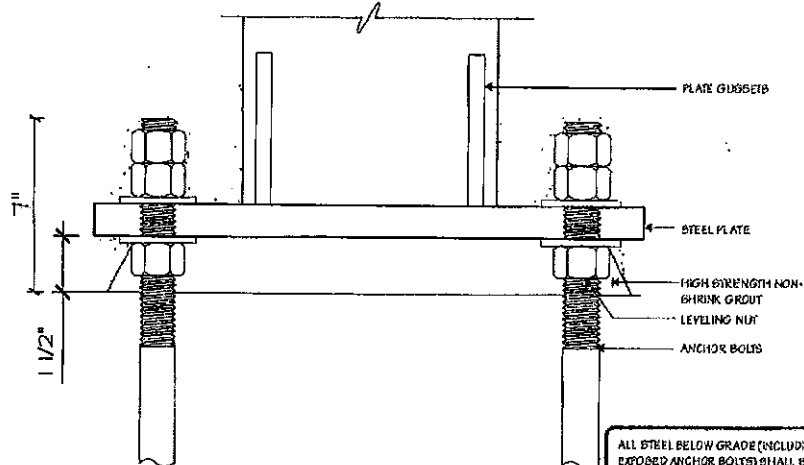


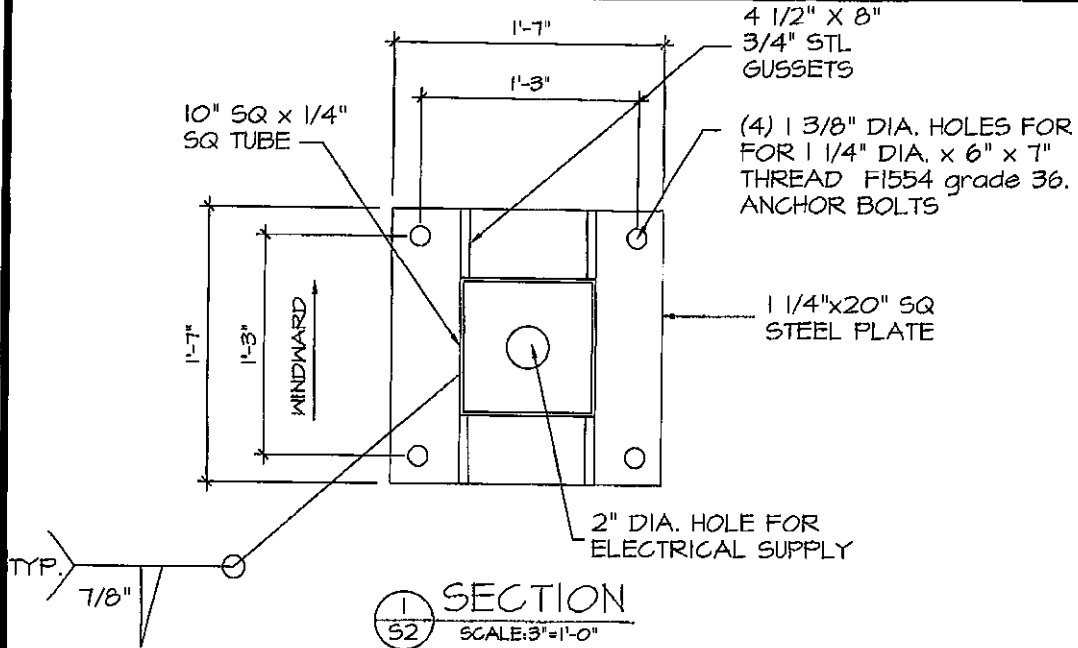

ALL STEEL BELOW GRADE (INCLUDING
EXPOSED ANCHOR BOLTS) SHALL BE
COATED W/ CARBOLINE BITUMASTIC
50 COAT TAP OR EQUAL AFTER
INSTALLATION AND PRIOR TO BACKFILL

2 BOLT DETAIL

N.T.S.

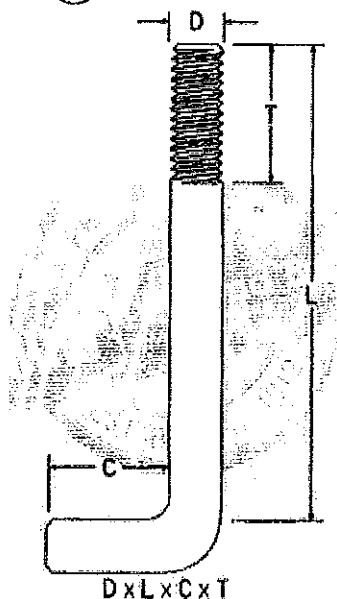

Anchor Bolt Size (D x L x C x T)			
Diam.	Length	Hook	Thread
1 1/4	32	6	7

WAYNE GANDY, P.E.
PE 033134
720 S. ORANGE BLOSSOM TR.
SUITE 364
ORLANDO, FL. 32805

CLIENT:

20'-0" MONUMENT

PROJECT:

DESIGNAGE

JOB#:

2018-0359

DATE:

06-11-2018

SHEET

2

OF

2