


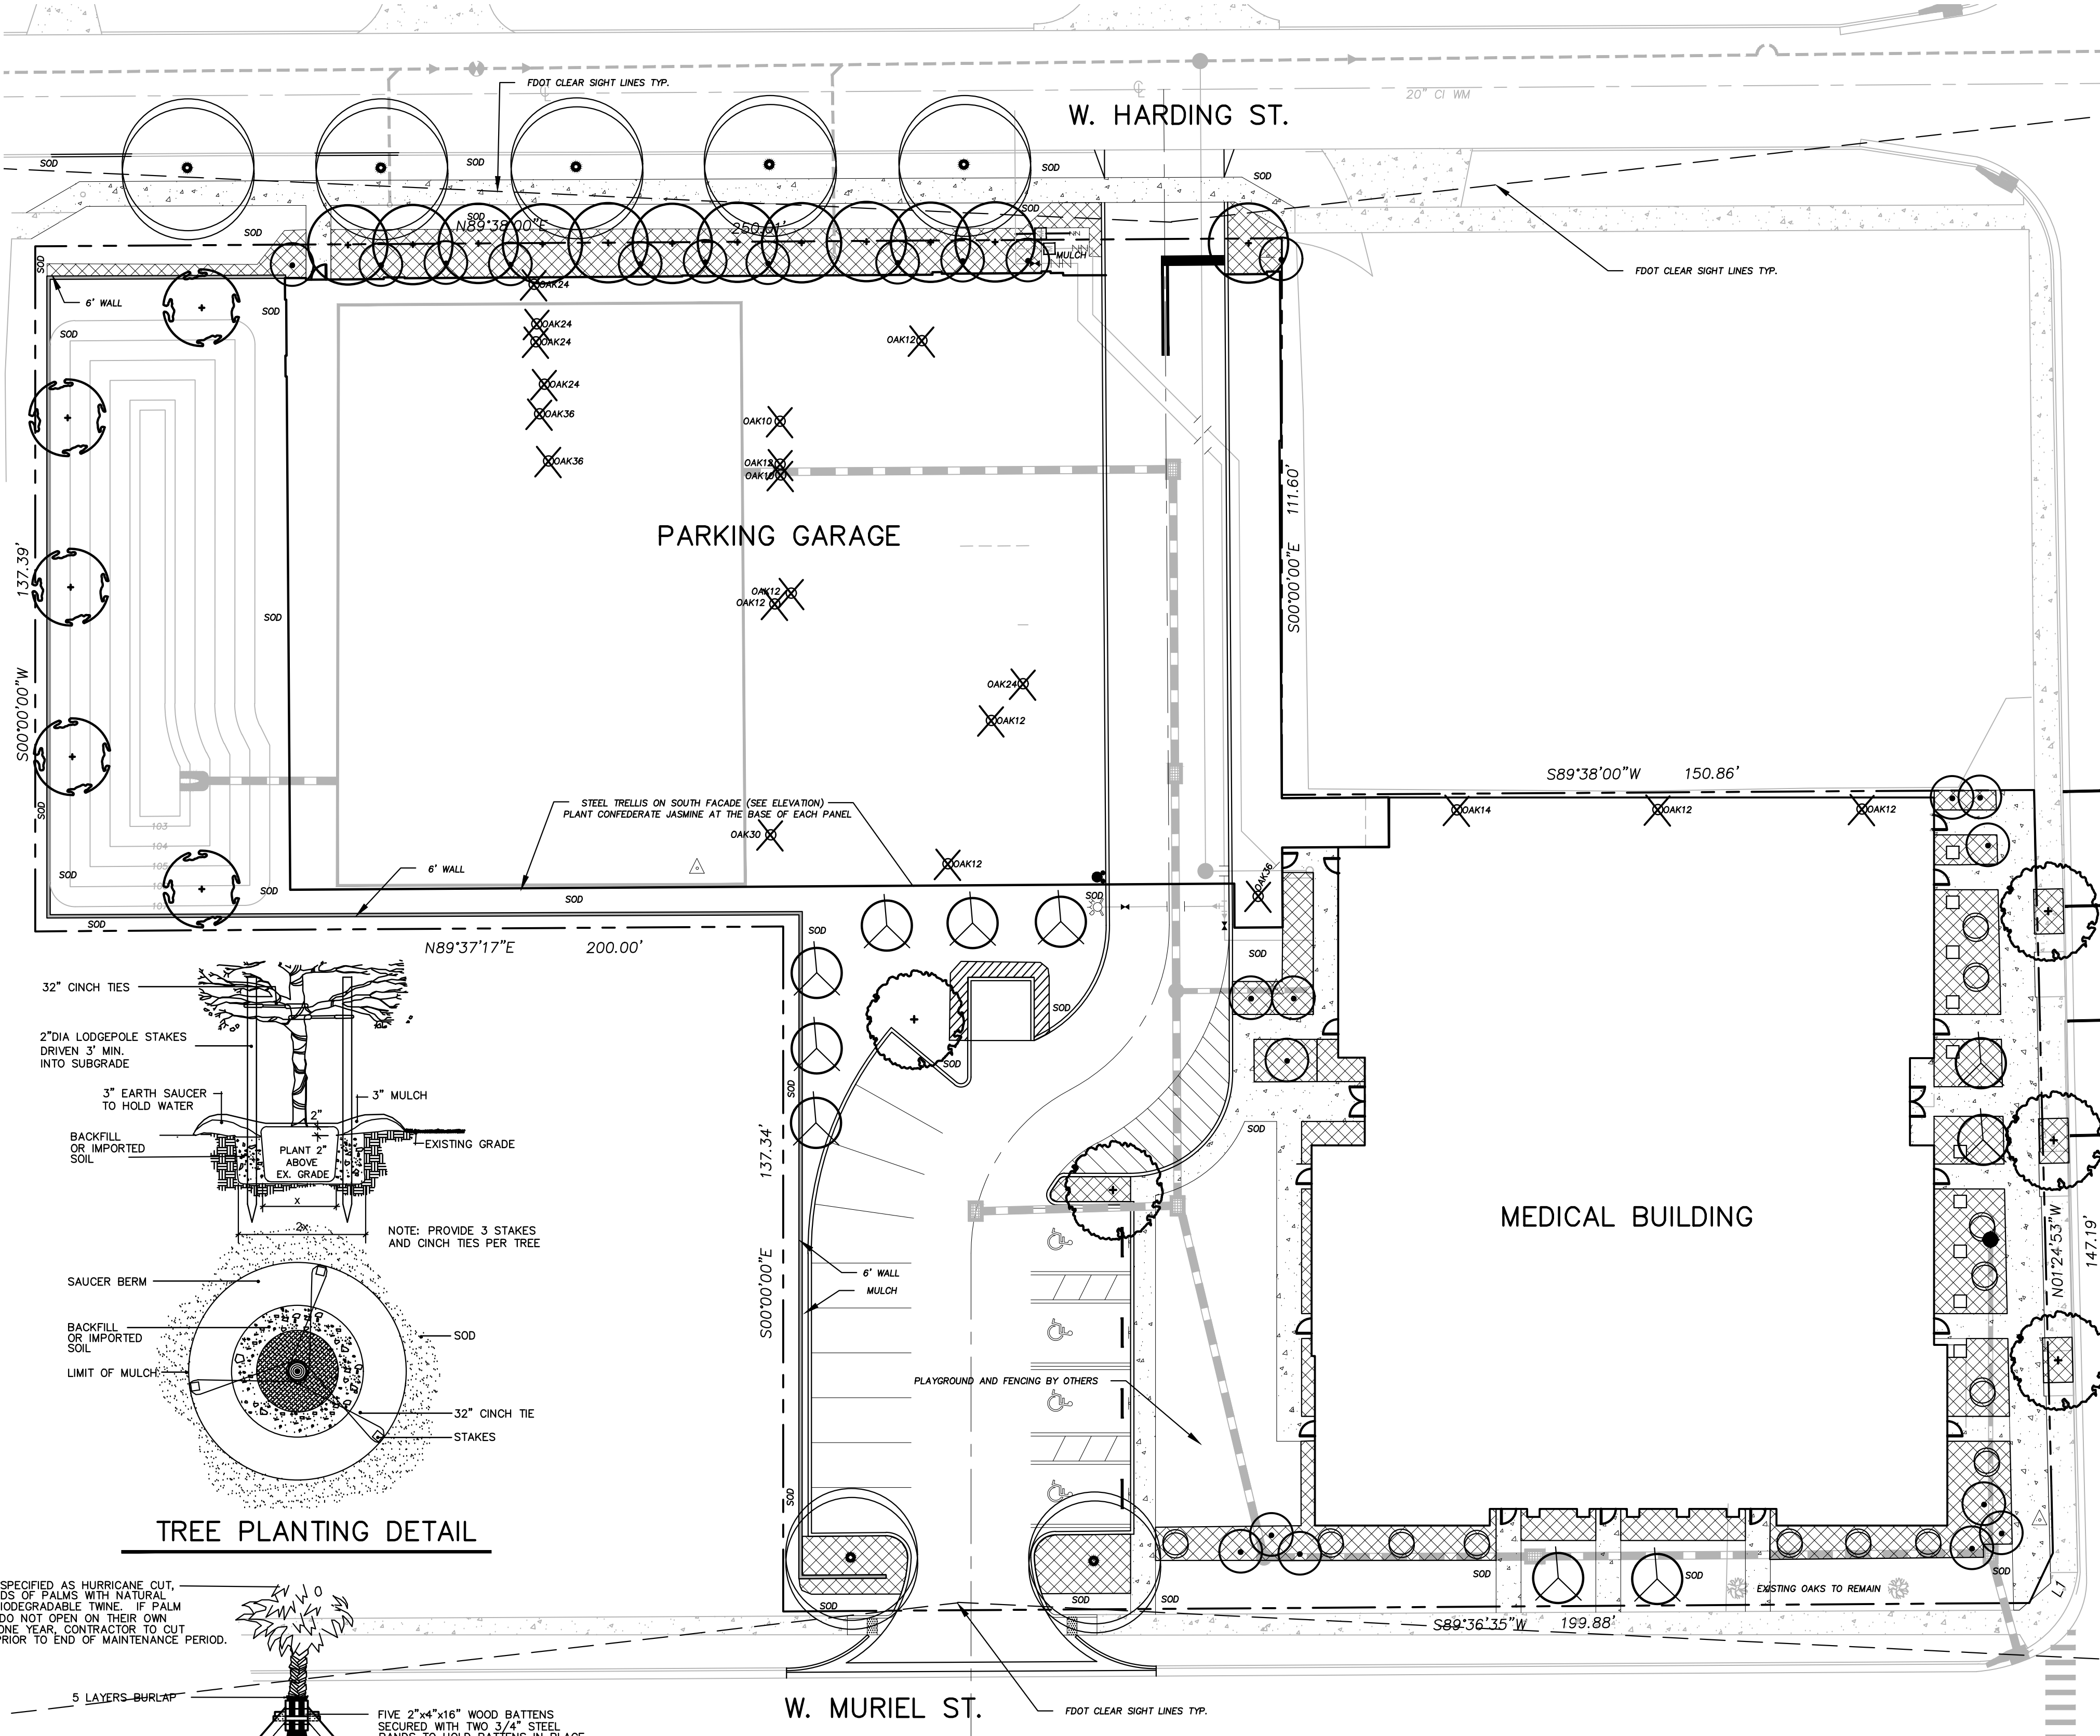


EXHIBIT
B

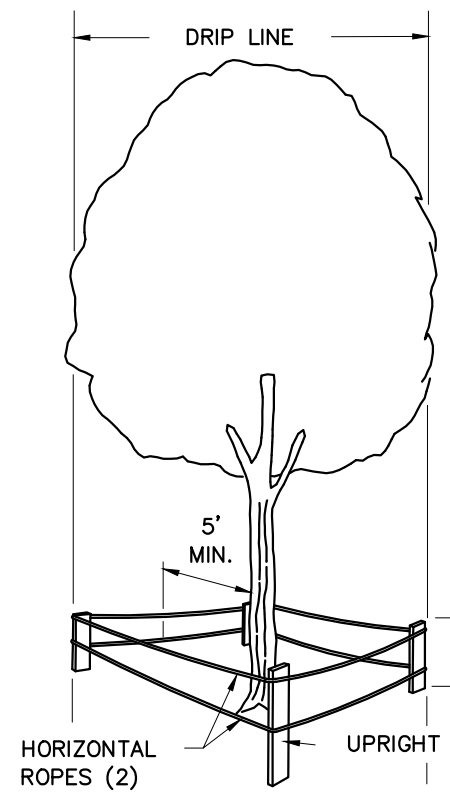

- WHY A BARRIER?**
1. TO PROTECT ALL ABOVE GROUND PORTIONS
 2. TO PROTECT SOIL NEAR TREE FROM COMPACTION
 3. PROVIDES PHYSICAL AND MENTAL AWARENESS OF TREES' PRESENCE TO EQUIPMENT OPERATORS
- SPECIFICATIONS FOR WOOD BARRIER**
1. MINIMUM RADIUS TO BE PROTECTED IS ENTIRE DRIPLINE
 2. MINIMUM 3' IN HEIGHT
 3. UPRIGHTS- THE EQUIVALENT OF 2"x4" LUMBER ON 6' MINIMUM CENTERS
 4. HORIZONTAL- THE EQUIVALENT OF TWO COURSES OF 1/2" ROPING WITH YELLOW PLASTIC TAPE FLAGGING
 5. BARRIERS TO BE ERRECTED AROUND TREES TO REMAIN BEFORE CONSTRUCTION OR WHEN NEARBY TREES ARE REMOVED
 6. BARRIERS TO REMAIN IN PLACE UNTIL ALL PAVING, CONSTRUCTION AND HEAVY EQUIPMENT IS OUT OF AREA
- NOTE:**
BARRIER MUST BE ERRECTED PRIOR TO CONSTRUCTION

TREE PROTECTION MEASURES


PLANT LIST / SYMBOLS LEGEND

QTY	SYM	COMMON NAME (BOTANICAL NAME)	SPECIFICATIONS
TREES:			
5	TD	BALD CYPRESS (TAXODIUM DISTICHUM)	45 GAL. MIN., 12' HT. MIN., 3" CAL. MIN., 2' CT, FULL
7	QV	LIVE OAK (QUERCUS VIRGINIANA 'HIGH RISE')	100 GAL. MIN., 15' HT. MIN., 4" CAL. MIN., 6' CT, FULL
23	SP	CABBAGE PALM (SABAL PALMETTO)	12 @ 16' CT HT., 11 @ 20' CT HT., STRAIGHT TRUNK, NO SCARS ALTERNATE TRUNK HTS. WITHIN EACH CLUSTER OR ROW OF PALMS
5	UP	BOSQUE ELM (ULMUS PARVIFOLIA 'EMER II')	100 GAL. MIN., 15' HT. MIN., 3.5" CAL. MIN., 5' CT, FULL
10	LI	GRAPE MYRTLE (LAGERSTROEMIA INDICA 'TUSKEGEE')	30 GAL. MIN., 8' HT. MIN., MULTI-TRUNK, 4' CT, FULL
12	IA	EAGLESTON HOLLY (ILEX x ATTENUATA 'EAGLESTON')	100 GAL. MIN., 12' HT. MIN., 7" SPREAD MIN., 3.5" CAL. MIN., 2' CT, FULL
SCREEN SHRUBS AT DUMPSTER:			
VO		SWEET VIBURNUM (VIBURNUM ODORATISSIMUM)	3 GAL. MIN. 30" HT. MIN., 30" OC, FULL
ACCENT SHRUBS:			
CA		CRINUM LILY (CRINUM ASIATICUM 'QUEEN EMMA')	15 GAL. MIN., 4' HT. MIN., FULL PLANT
ORNAMENTAL SHRUBS AND GROUNDCOVER:			
LC		PURPLE PIXIE LORAPETALUM (LORAPETALUM CHINENSIS 'PURPLE PIXIE')	3 GAL. MIN., 12" HT. MIN., 18" SPREAD MIN., 30" OC, FULL, NO SUBSTITUTIONS
LM		EMERALD GODDESS LIRIOPE (LIRIOPE MUSCARI 'EMERALD GODDESS')	1 GAL., 12" SPREAD. MIN., 18" OC, FULL PLANT, NO SUBSTITUTIONS
TV		VARIEGATED ASIAN JASMINE (TRACHELOSPERMUM ASIATICUM 'VARIEGATA')	1 GAL., 12" SPREAD. MIN., 18" OC, FULL PLANT
SA		VARIEGATED DWARF SHEFFLERA (SCHEFFLERA ARBORICOLA)	7 GAL. MIN., 24" HT. MIN., 30" OC, FULL PLANT
DT		VARIEGATED FLAX LILY (DANIELLA TASMANICA 'VARIEGATA')	1 GAL., 12" HT. MIN., 24" OC, FULL PLANT
JP		PARSON'S JUNIPER (JUNIPERUS CHINENSIS 'PARSONII')	3 GAL. MIN., 12" HT. MIN., 18" SPREAD MIN., 30" OC, FULL PLANT
RA		DWARF INDIAN HAWTHORN (RAPHIOLEPIS INDICA 'ALBA')	3 GAL. MIN., 12" HT. MIN., 18" SPREAD MIN., 30" OC, FULL PLANT
MC		GULF PINK MUHLY GRASS (MUHLENBERGIA CAPILLARIS)	3 GAL., 18" HT./SPR. MIN., 30" OC, FULL PLANT
TJ		CONFEDERATE JASMINE (TRACHELOSPERMUM JASMINOIDES)	1 GAL., STAKED, ATTACHED TO SCREEN USING CABLE TIES, 3' OC, FULL PLANT
SOD		ST. AUGUSTINE (STENOTAPHRUM SECUNDATUM 'FLORATAM') SOLID SOD.	SOD TO BE LAID WITH SOIL MAT FLUSH WITH TOP OF CURB AND PAVEMENT


PLANT NOTES

- 1). ALL LANDSCAPED AND SODDED AREAS DELINEATED ON THESE PLANS SHALL BE IRRIGATED BY AN AUTOMATIC SYSTEM. THE IRRIGATION SYSTEM SHALL PROVIDE 100% HEAD-TO-HEAD COVERAGE FOR ALL GREEN AREAS. RAIN SENSOR REQUIRED.
- 2). ALL LANDSCAPED BEDS SHALL BE TOP DRESSED WITH 3" OF PINE BARK NUGGET MULCH.
- 3). ALL TREE SAUCERS SHALL BE TOP DRESSED WITH 3" OF PINE BARK NUGGET MULCH.
- 4). IT IS THE RESPONSIBILITY OF THE LANDSCAPE CONTRACTOR TO BECOME FULLY FAMILIAR WITH ALL EXISTING SITE CONDITIONS AND TO STUDY ALL SUBSURFACE UTILITY PLANS AND ARCHITECTURAL PLANS SO AS TO PREVENT DAMAGE DURING THE INSTALLATION OF THE LANDSCAPE MATERIAL.
- 5). STAKING OF TREES IS AT THE OPTION OF THE LANDSCAPE CONTRACTOR. HOWEVER, IT IS THE RESPONSIBILITY OF THE LANDSCAPE CONTRACTOR TO MAINTAIN ALL TREES, PALMS AND SHRUBS IN AN UPRIGHT PLUM CONDITION.
- 6). THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE TO ARCHITECTURAL OR PAVED SURFACES.
- 7). ALL PLANT MATERIAL SHALL BE GRADED FLORIDA NO. 1 ACCORDING TO THE GRADES AND STANDARDS OF THE FLORIDA NURSERYMAN'S ASSOCIATION.
- 8). ALL TREE CALIPER DIMENSIONS SHALL BE MEASURED 6" ABOVE THE TOP OF THE ROOT BALL.
- 9). THE LANDSCAPE CONTRACTOR SHALL WARRANTY ALL SHRUBS FOR A PERIOD NO SHORTER THAN 90 DAYS FROM THE DATE OF THE "FINAL ACCEPTANCE" BY THE CLIENT AND LANDSCAPE ARCHITECT. ALL TREES SHALL CARRY A MINIMUM ONE YEAR WARRANTY. ALL WARRANTY RESTRICTIONS SHALL BE SPECIFICALLY DESCRIBED IN WRITING AND SHALL BE PART OF THE BIDDING DOCUMENTS PROVIDED TO THE CLIENT BY THE LANDSCAPE CONTRACTOR.
- 10). CONTRACTOR IS RESPONSIBLE FOR PLANT AND SOD QUANTITY TAKE-OFF. QUANTITIES PROVIDED FOR CONVENIENCE ONLY. PLAN QUANTITIES RULE OVER LIST QUANTITIES.


TREE PLANTING DETAIL

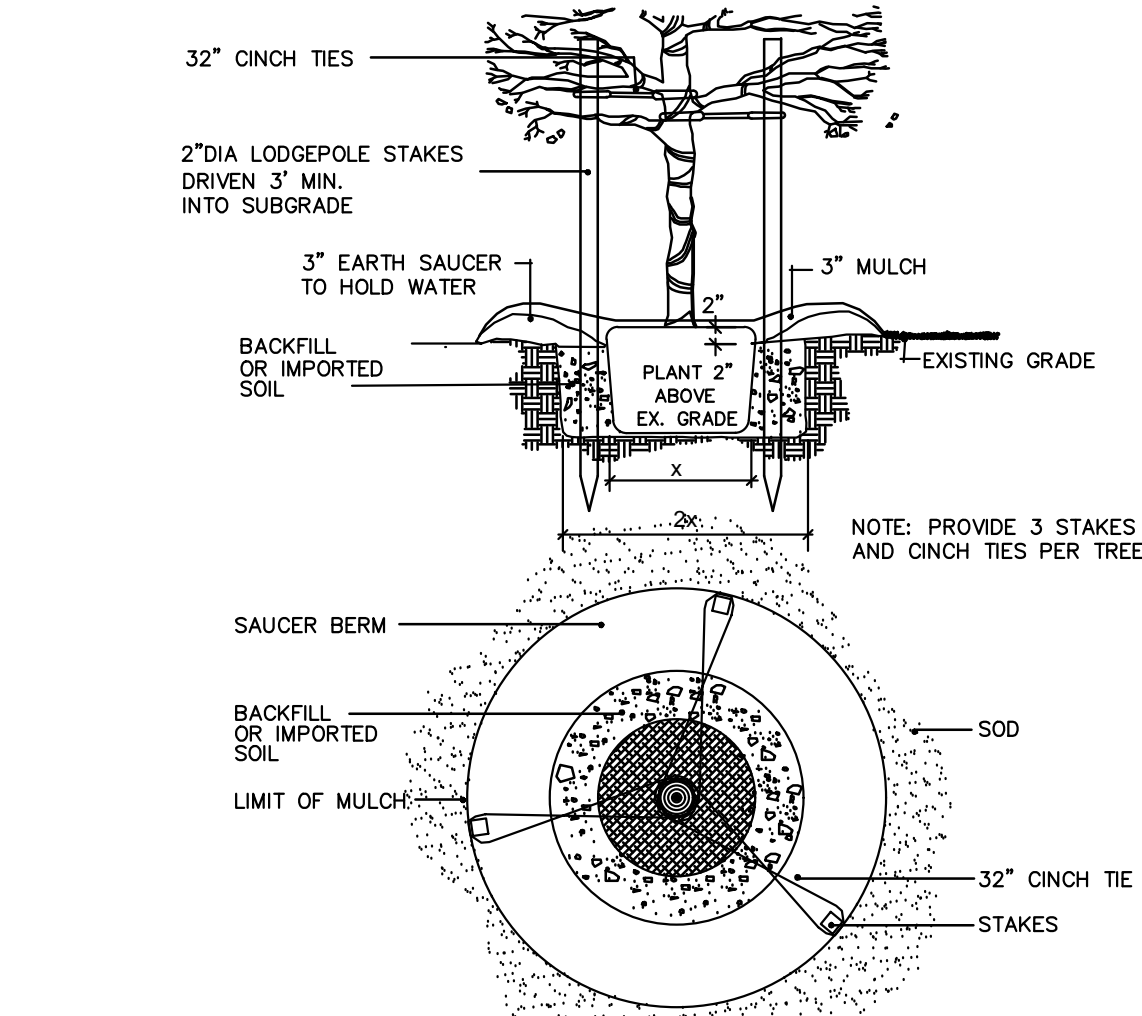

PALM PLANTING DETAIL

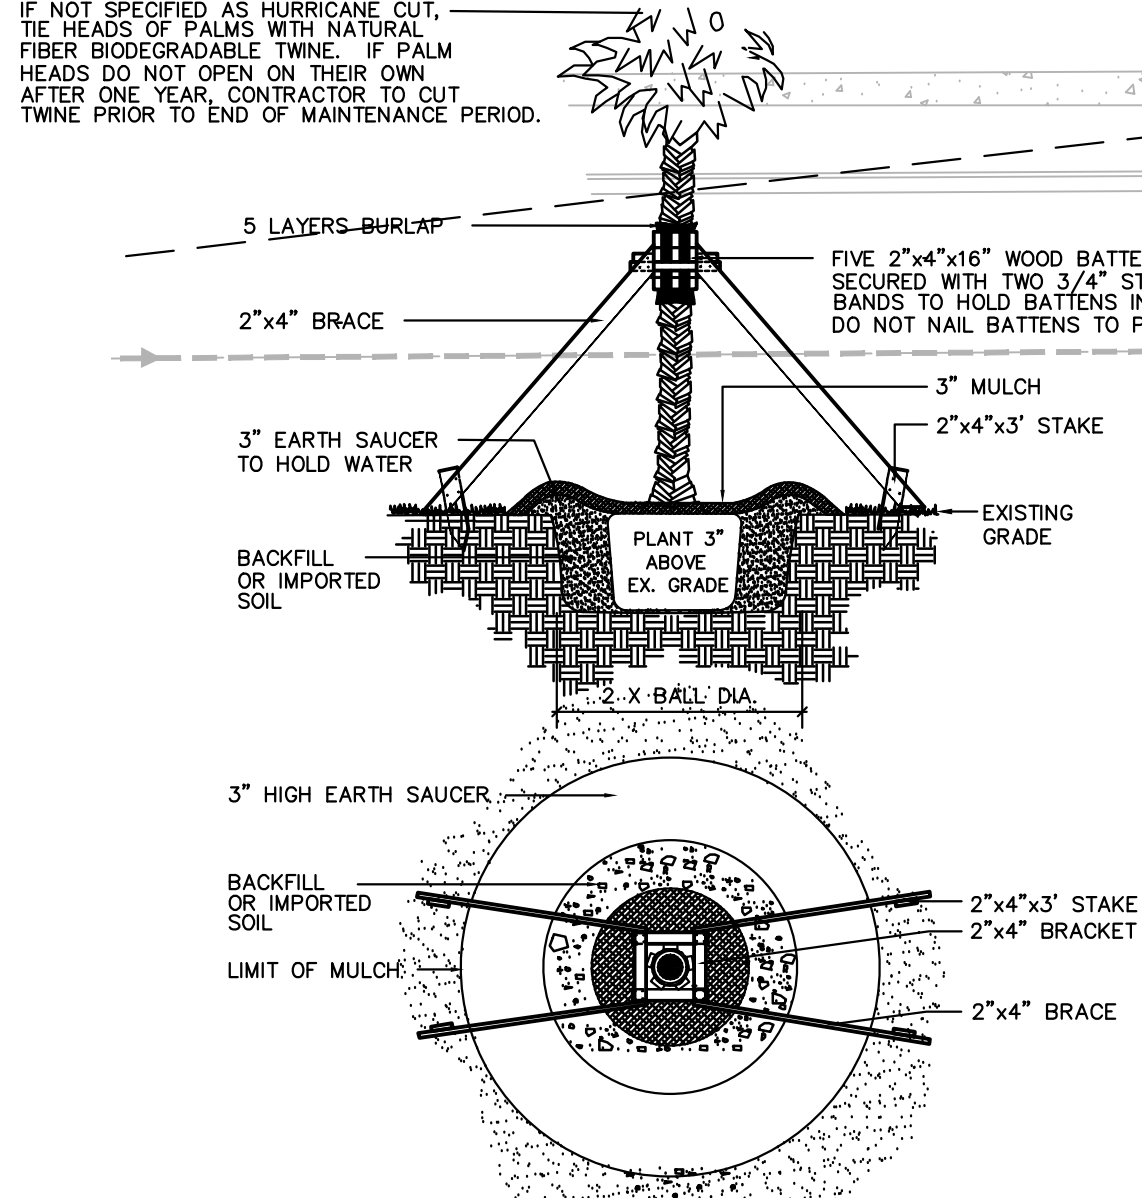

SHRUB AND GROUNDCOVER PLANTING DETAIL

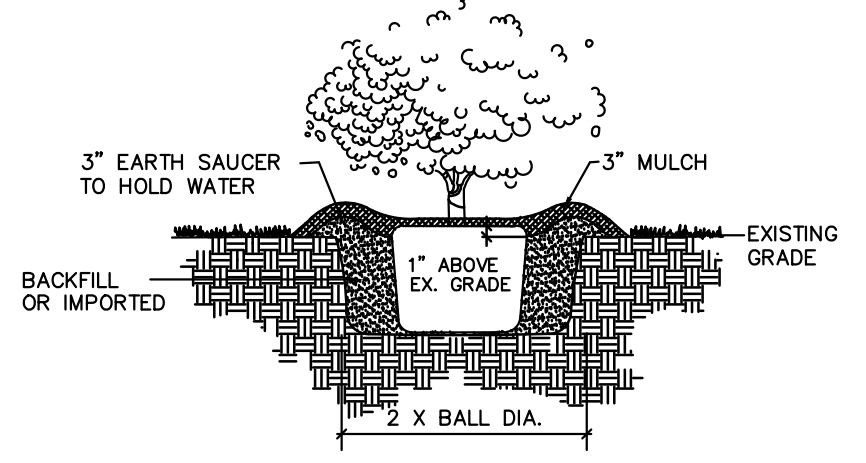

CITY CODE REQUIREMENTS PER CHAP. 60 AND 61

TOTAL SITE AREA = 72,973 SF TOTAL IMPERVIOUS AREA = 37,508 SF
20,303 SF PERVIOUS AREA X 60% = 12,181 SF MAX. SOD AREA ALLOWED. 12,181 SF PROVIDED (SEE SOD LABELS)
20,303 SF PERVIOUS AREA X 40% = 8,121 SF MINIMUM MULCHED LANDSCAPE AREA REQUIRED. 8,121 SF PROVIDED

ORLANDO LDC REQUIREMENTS

FINAL PLANS SHALL MEET ALL REQUIREMENTS IN CHAPTERS 60 AND 61 OF THE CITY LDC, AND THE LANDSCAPE SCORE SPREADSHEET

J. SCOTT LIBERTY, LANDSCAPE ARCHITECT
FLORIDA REGISTRATION NO. LA0001476
5621 REVELWOOD LOOP, WINTER PARK, FL. 32782
PHONE: 407-719-2124 E-MAIL: JSCOTTLIB@CFL.RR.COM